

COUNTY OF HUMBOLDT

ADA MODIFICATIONS

COUNTY PROJECT No.: 2018-201



COUNTY OF HUMBOLDT
 ADA MODIFICATIONS

PROJECT DESCRIPTION

ARTHUR W. WAY PARK:

NEW ACCESSIBLE ROUTE:

- INSTALL NEW SMOOTH AND LEVEL SURFACES AS ACCESSIBLE ROUTES TO TRASH RECEPTACLES, WATER HYDRANTS, PUBLIC PHONE AND FEE STATION.
- INSTALL NEW ACCESSIBLE DRINKING FOUNTAIN IN PLACE OF SPIGOT WITH NEW SMOOTH AND LEVEL SURFACE SURROUNDING

NEW ACCESSIBLE CAMPSITES(2) AT THE NORTH END OF THE PARK:

- REMODEL (2) CAMPSITES TO INCLUDE ACCESSIBLE PICNIC TABLE AND FIRE RING.
- INSTALL NEW SMOOTH AND LEVEL SURFACE FOR ACCESS AROUND AND TO ACCESSIBLE PICNIC TABLE AND FIRE RING.

TOILET ROOMS AT THE REAR OF THE PARK – MEN'S AND WOMEN'S

- INSTALL NEW TOILET ACCESSORIES COMPLAINT TO CODE, INCLUDING ACCESSIBLE SHOWER SPRAY, FAUCET CONTROL AND COMPLIANT TOILET PAPER DISPENSER.
 INSTALL ACCESSIBLE RESTROOM SIGNAGE.

SHEET INDEX:

G001	COVER SHEET, SHEET INDEX
CD100	EXISTING/DEMOLITION SITE PLAN
CD101	EXISTING TOILET FACILITIES AND DEMO PHOTOS
CS100	EROSION PLAN AND NOTES
C100	NEW SITE PLAN DETAILS
C101	PARTIAL ENLARGED SITE PLANS
C501	NEW MODIFICATION DETAILS

Revisions:

Client Number: 2018-201
 Project Number: 683.00
 Date: Nov. 28, 2018

Sheet Title:

COVER SHEET

Sheet Number:

G001

ARTHUR W. WAY PARK



COUNTY OF HUMBOLDT
 ADA MODIFICATIONS

Revisions:
 Client Number: 2018-201
 Project Number: 683.00
 Date: Nov. 28, 2018
 Sheet Title:
 EXISTING TOILET FACILITIES DEMO AND PHOTOS
 Sheet Number:

KEYED NOTES:

- ① REMOVE EXISTING WATER SPIGOT, WATER PIPE TO REMAIN FOR CONNECTION TO NEW DRINKING FOUNTAIN
- ② SAWCUT AND REMOVE EXISTING ASPHALT PAVING, SEE 2/CD100 FOR FULL EXTENTS OF ASPHALT REMOVAL.
- ③ PRESERVE EXISTING WOOD STRUCTURE INFORMATION BOARD.
- ④ PRESERVE EXISTING FEE COLLECTION BOX
- ⑤ EXISTING SINK TO REMAIN (TYP), ADJUST PUSH BUTTON CONTROLS TO OPERATE WITH 5# OR LESS OF PRESSURE AND SHALL OPERATE FLOW MIN. OF 10 SECONDS PER 11B-606.4.
- ⑥ EXISTING PHONE BOOTH TO REMAIN
- ⑦ 60" TURNING RADIUS (TYP.)
- ⑧ NEW PATHWAY FROM CAMPSITES TO TOILETS AND SHOWERS, SEE CD100 AND C100 FOR EXTENTS
- ⑨ TREES SHOWN ON SITE PLAN, FIELD VERIFY TO ACCOMMODATE NEW CAMPSITE AND PATHWAY PAVING SHOWN ON CD100 AND C100
- ⑩ REMOVE EXISTING COAT HOOK AND PROVIDE NEW COAT HOOK AT EXISTING LOCATION, MOUNT PER DETAIL 5/CD101
- ⑪ NEW DOOR SIGNAGE, SEE DETAIL 12/C501
- ⑫ NEW SIGNAGE ADJACENT TO DOOR, SEE DETAIL 12/C501
- ⑬ REMOVE EXISTING TOILET PAPER DISPENSER AND PROVIDE NEW TOILET PAPER DISPENSER AT LOCATION PER DETAIL 5/CD101
- ⑭ REMOVE EXISTING SHOWER SPRAY AND HOSE AND PROVIDE NEW ACCESSIBLE SHOWER SPRAY AT SAME LOCATION. MOUNT PER CBC 11B-309.4 AND CBC 11B-608.5 THROUGH 11B-608.6
- ⑮ REMOVE EXISTING CONCRETE AROUND PHONE BOOTH. PHONE BOOTH TO REMAIN.
- ⑯ REMOVE EXISTING BENCH.



⑩ (E) WELCOME BOARD + FEE STATION



⑥ (E) WATER SPIGOT AT FEE STATION



② (E) PHONE BOOTH + BENCH



⑪ (E) FEE STATION PARKING



⑦ (E) ACCESSIBLE TOILET+SHOWER FACILITY



③ (E) ACCESSIBLE TOILET+SHOWER FACILITY



⑫ (E) CAMP SITE 1 FROM STREET



⑧ FUTURE TOILET ROOM ACCESS PATHWAY




④ (E) ACCESSIBLE SINKS • TOILET ROOMS




⑬ (E) CAMP SITE 1 FROM FIRE PIT




⑨ (E) CAMP SITE

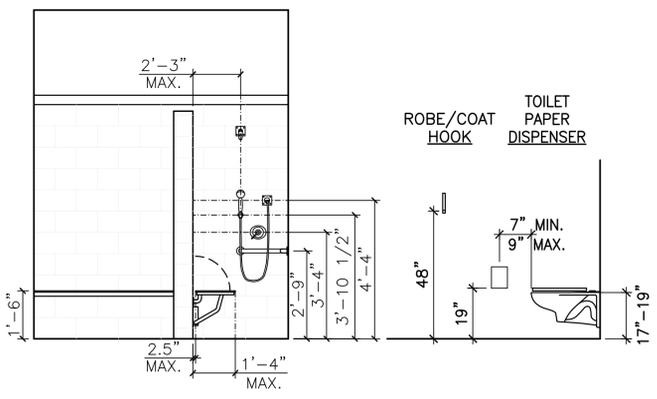

⑤ MOUNTING HEIGHTS

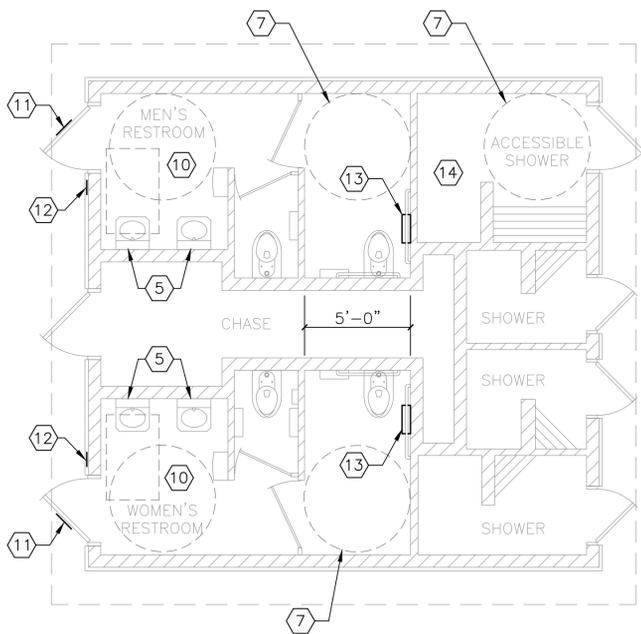

① EXISTING TOILET/SHOWER FACILITY PLAN
 1/4"=1'-0"

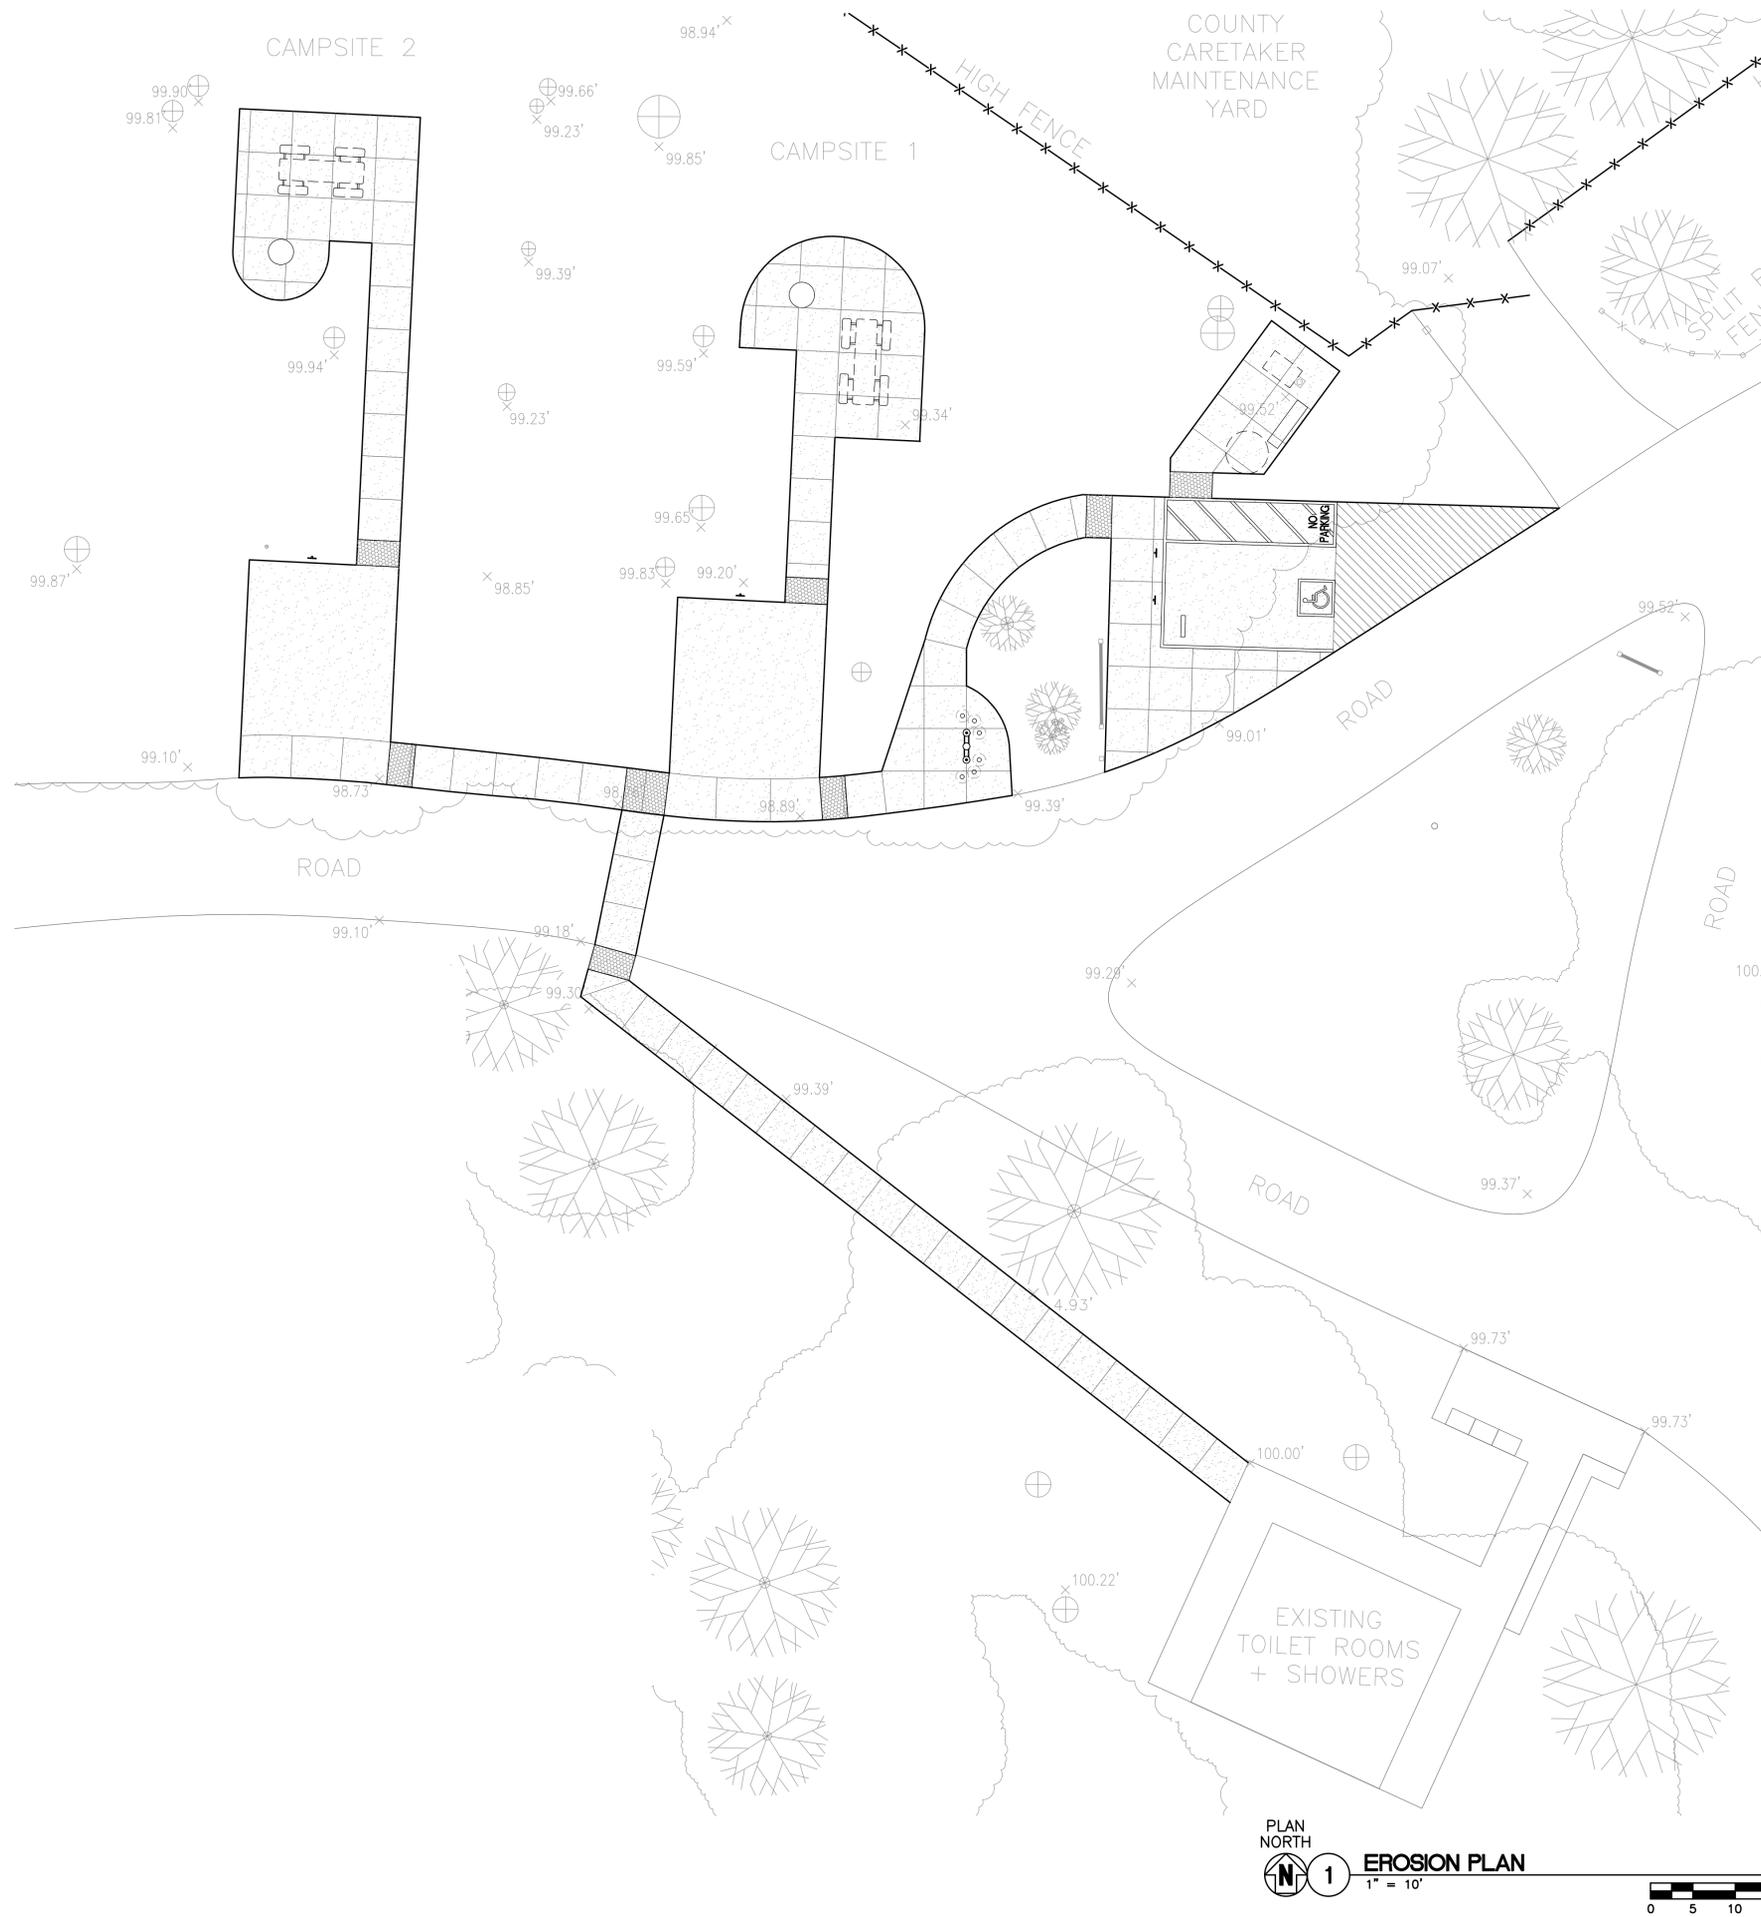

EROSION AND SEDIMENTATION CONTROL NOTES:

1. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO MAINTAIN CONTROL OF THE ENTIRE CONSTRUCTION OPERATION AND TO KEEP THE ENTIRE SITE IN COMPLIANCE WITH STATE AND LOCAL SOIL EROSION CONTROL LAWS AND MEASURES.
2. THIS PLAN IS INTENDED TO ONLY BE USED FOR EROSION AND SEDIMENT CONTROL FOR YEAR-ROUND SITE CONSTRUCTION, INCLUDING DEMOLITION, EARTHWORK OPERATION AND SITE IMPROVEMENTS. EROSION MEASURES ARE TO BE IN PLACE PRIOR
3. TO START OF CONSTRUCTION. ALL SLOPES SHALL BE PROTECTED IMMEDIATELY FOLLOWING EARTHWORK GRADING.
4. CONTRACTOR SHALL BE RESPONSIBLE FOR IMPLEMENTING & MAINTAINING EROSION AND SEDIMENT CONTROL MEASURES PRIOR, DURING AND AFTER STORM EVENTS.
5. ALL EROSION CONTROL WORKS SHALL BE IN ACCORDANCE TO THIS PLAN AND THE CALIFORNIA STORMWATER QUALITY ASSOCIATION 2011 STORMWATER BEST MANAGEMENT PRACTICE HANDBOOK PORTAL: CONSTRUCTION, HEREBY REFERRED TO AS "THE HANDBOOK" AND PER SPECIFICATION SECTION 31 25 00 EROSION AND SEDIMENTATION CONTROL.

BASIC EROSION CONTROL MEASURE SHALL INCLUDE, BUT NOT BE LIMITED TO:

WATERING FOR DUST CONTROL

INSTALLATION OF PERIMETER STORM WATTLE
SEDIMENT PROTECTION AT STORM DRAIN INLETS

6. CONTRACTOR SHALL CARRY OUT CONSTRUCTION OPERATIONS IN SUCH A MANNER THAT EROSION AND WATER POLLUTION WILL BE MINIMIZED.

EXERCISE REASONABLE CARE WHEN HAULING ANY CONSTRUCTION DEBRIS OVER EXISTING ROADWAYS. SHOULD ANY BLOW, SPILL OR TRACK OVER AND UPON SAID PUBLIC OR ADJACENT PRIVATE PROPERTY, IMMEDIATELY REMEDY THE SITUATION BY USING PROPER CLEANING PROCEDURES.

CONTRACTOR SHALL KEEP ALL PAVED AREAS CLEAR OF EARTH, MATERIAL AND DEBRIS. PROVIDE STREET SWEEPING AS NECESSARY, PER BMP FACT SHEET SE-7 OF "THE HANDBOOK".

MAINTAIN AN INSPECTION SCHEDULE FOR THE IMPLEMENTED SEDIMENT AND EROSION BMP MEASURES AT LEAST ONCE A WEEK AND/OR 24 HOURS BEFORE AND AFTER A FORECASTED RAIN EVENT.

7. CONTRACTOR SHALL PREPARE AND MAINTAIN THE FACES OF CUT AND FILL SLOPES TO CONTROL EROSION.
8. REMOVE EROSION CONTROL AT END OF PROJECT.
9. CONTRACTOR SHALL PROVIDE DUST CONTROL AS REQUIRED BY THE APPROPRIATE STATE AND LOCAL AGENCY REQUIREMENTS, AND IN ACCORDANCE WITH BMP FACT SHEET OF "THE HANDBOOK".
10. CONTRACTOR SHALL FOLLOW "THE HANDBOOK" FACT SHEET BMPs FOR ALL APPLICABLE ON-SITE STORMWATER MANAGEMENT CONSTRUCTION ACTIVITIES, ON-SITE WASTE MANAGEMENT AND MATERIALS POLLUTION CONTROL CONSTRUCTION ACTIVITIES.
11. ALL DAMAGE TO BMPs CAUSED BY SOIL EROSION OR CONSTRUCTION SHALL BE REPAIRED AT THE END OF EACH WORK DAY.

LEGEND:

-  (N) ASPHALT PAVING
-  (N) CONCRETE
-  (E) TREE TRUNK WITH CANOPY OVERHEAD, FIELD VERIFY EXISTING PLACEMENT AS NECESSARY
-  (E) SPOT ELEVATION



COUNTY OF HUMBOLDT
ADA MODIFICATIONS

Revisions:

Client Number: 2018-201
Project Number: 683.00
Date: Nov. 28, 2018

Sheet Title:
**EROSION PLAN
AND NOTES**


Sheet Number:

CS100

PLAN NORTH
 **1** EROSION PLAN
1" = 10'



ARTHUR W. WAY PARK

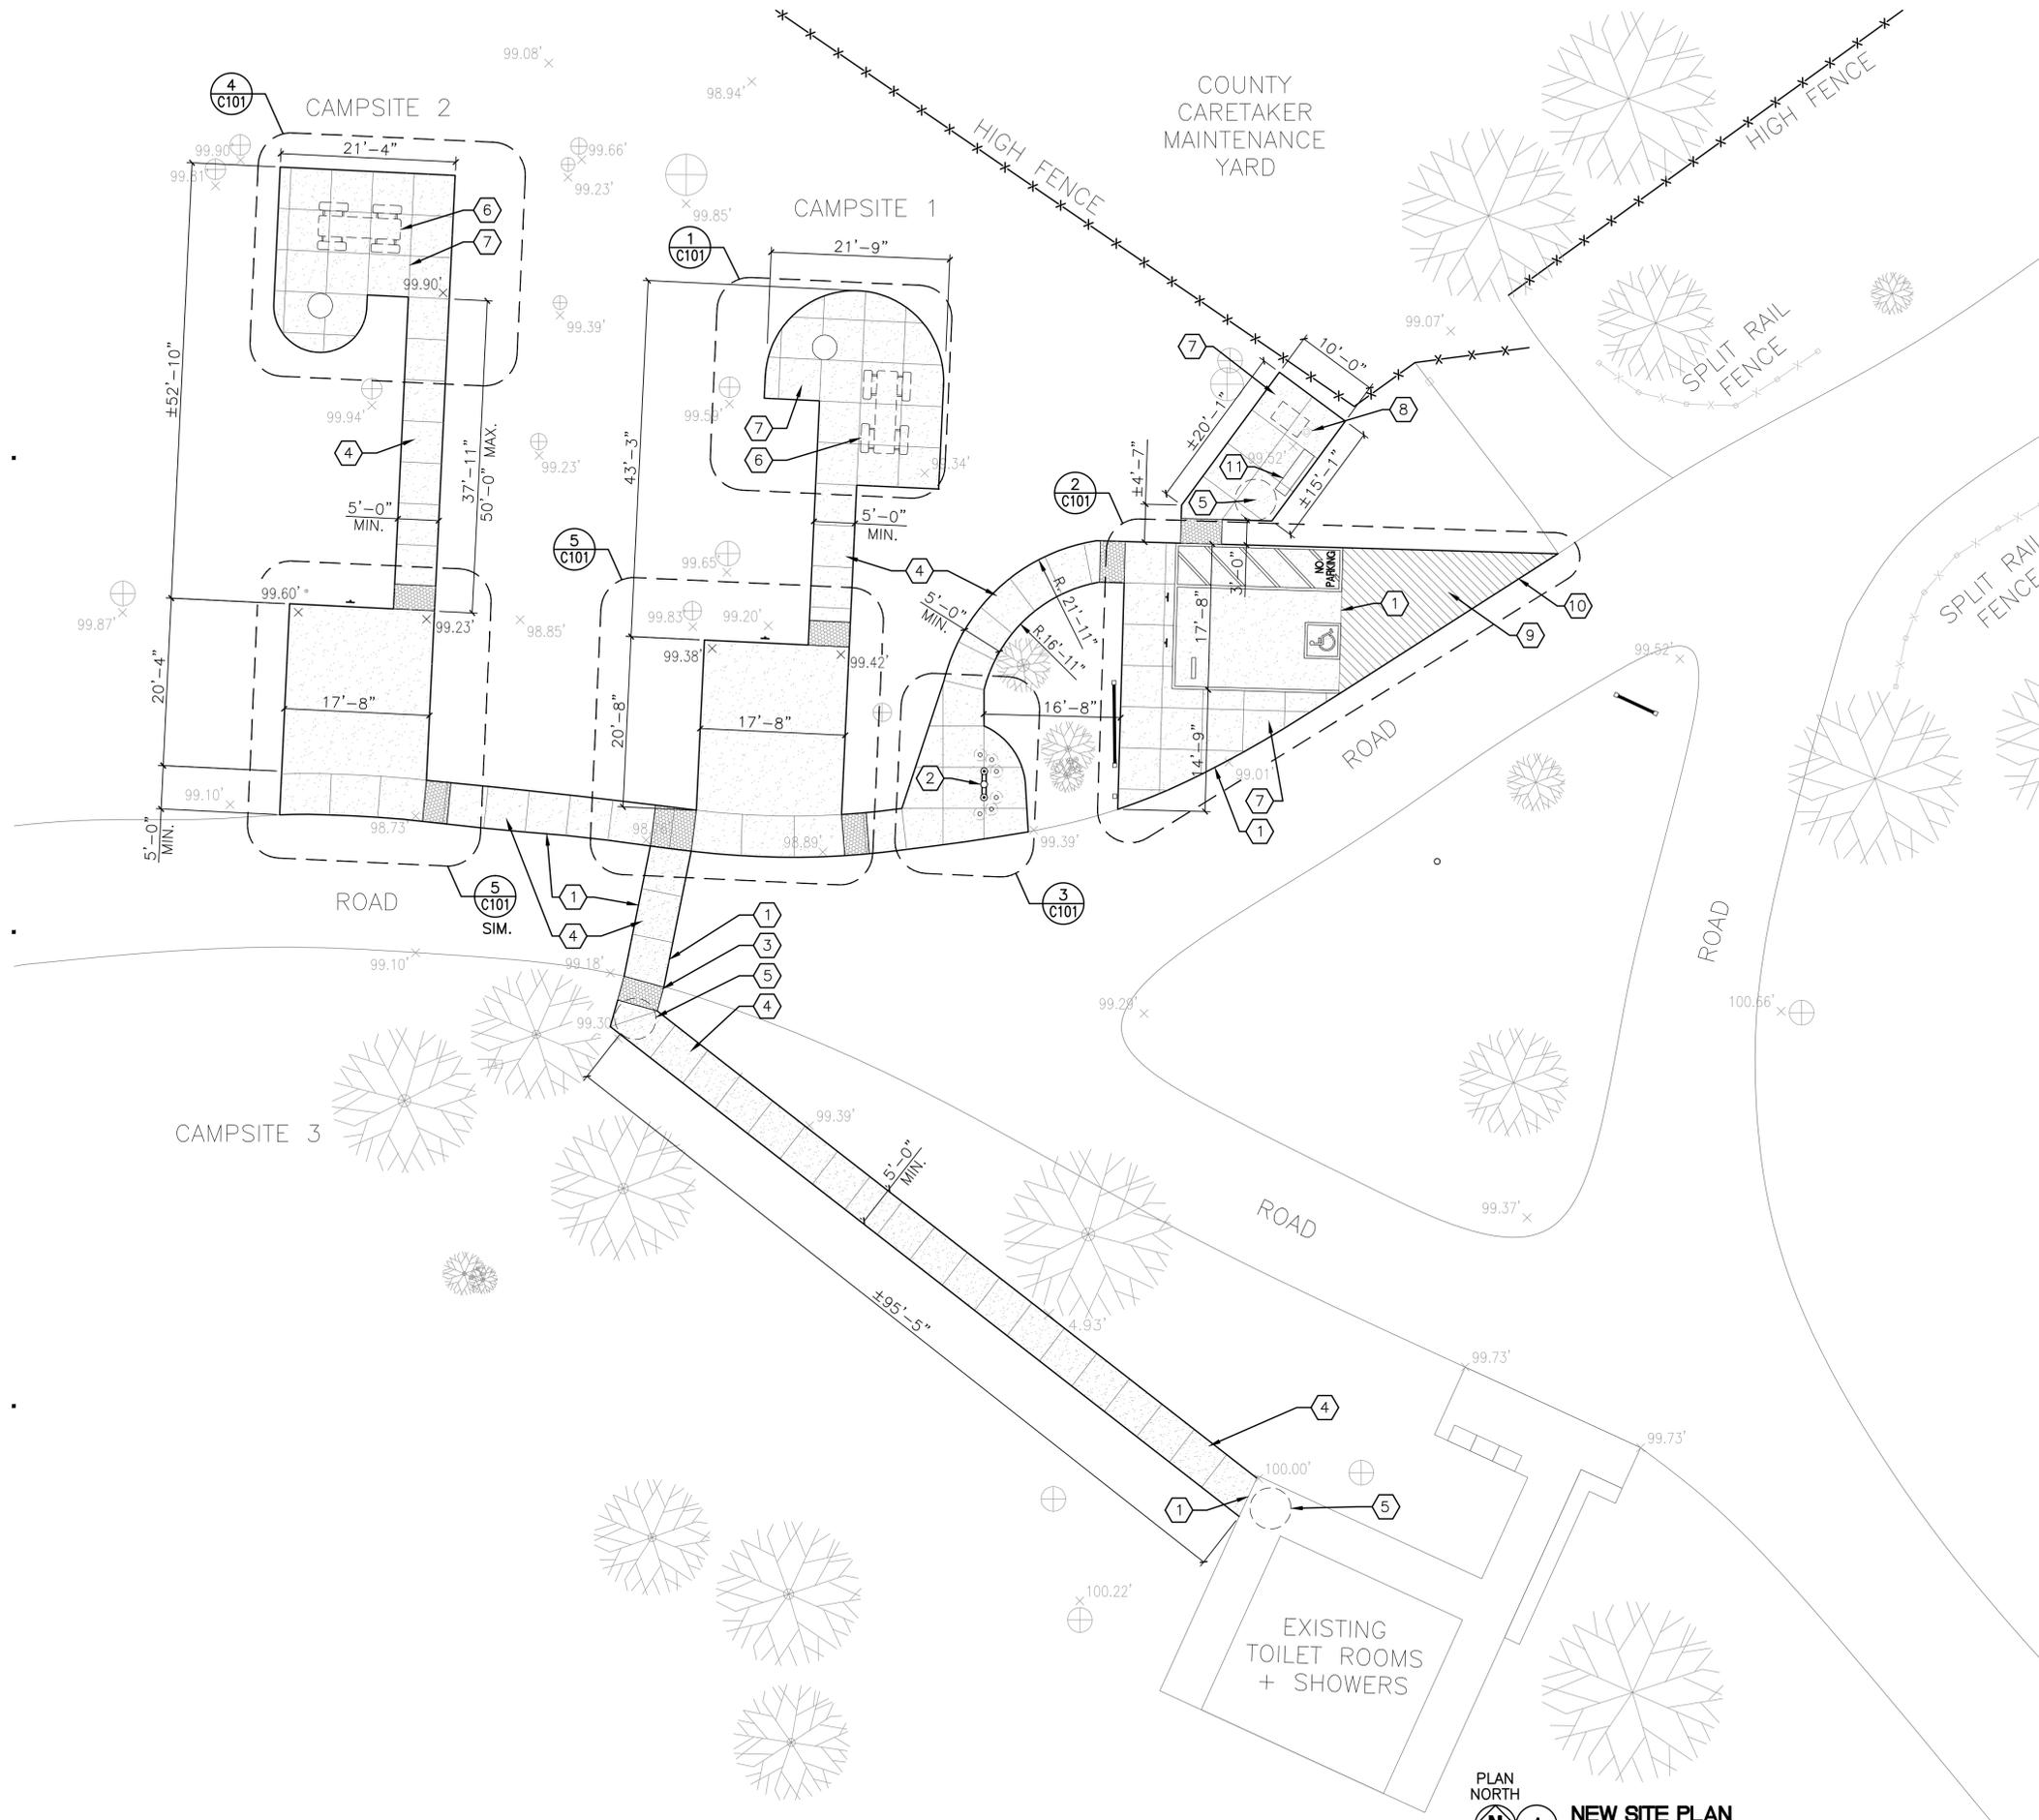

GENERAL NOTES:

- SEE SHEET G001 FOR INTENT OF SCOPE OF WORK FOR EACH AREA.

KEY NOTES:

- PROVIDE A SMOOTH TRANSITION FROM NEW CONCRETE TO EXISTING AND/OR NEW ASPHALT MATCH SAME ELEVATION.
- NEW FREESTANDING ADA ACCESSIBLE DRINKING FOUNTAIN w/ BOLLARD PROTECTION. SEE DETAILS 8/C501 & 9/C501
- PROVIDE TRUNCATED DOME RECESS IN NEW CONCRETE 36" DEEP EXTENDING FULL WIDTH OF CONCRETE WALK PER 11B-705.1.2.3. SEE DETAIL 7/C501.
- CONCRETE WALK, MAX. SLOPE 1:20 IN ACCESSIBLE ROUTE PATH, MAX. CROSS SLOPE 1:48, SEE DETAIL 3/C501.
- 60" TURNING RADIUS TO MAINTAIN 1:48.
- NEW ADA ACCESSIBLE PICNIC TABLE, MOVABLE. SEE 13/C501.
- NEW CONCRETE SLAB-ON-GRADE, MAX. SLOPE 1:48 IN ALL DIRECTIONS, SEE DETAIL 1/C501.
- EXISTING PHONE BOOTH TO REMAIN
- NEW ASPHALT PAVING, SEE DETAIL 4/C501
- PROVIDE A SMOOTH TRANSITION FROM NEW ASPHALT TO EXISTING ASPHALT, MATCH SAME ELEVATION.
- NEW BENCH ANCHORED TO CONCRETE SLAB.

LEGEND:

- (N) ASPHALT
- (N) CONCRETE
- TREE TRUNK W/ CANOPY OVERHEAD, TYP.
- TREE WITH LOWER/ACCESSIBLE BRANCHES
- EXISTING SPOT ELEVATION
- NEW SPOT ELEVATION

CODE COMPLIANCE:

CBC 2016, SECTION 1.8.3.2.3 – SPECIAL OCCUPANCY PARKS ACT REFERS TO TITLE 25, DIVISION 1, CHAPTER 2.2 OF THE CALIFORNIA CODE OF REGULATIONS AND STATES THAT IN FACILITIES SUCH AS A.W. WAY PARK, THERE ARE NO PAINTED PARKING STRIPING, PAINTED ACCESSIBILITY SYMBOLS IN PARKING STALLS, OR PARKING SIGNAGE REQUIREMENTS TO BE MET.



**COUNTY OF HUMBOLDT
 ADA MODIFICATIONS**

Revisions:
 Client Number: 2018-201
 Project Number: 683.00
 Date: Nov. 28, 2018

Sheet Title:
NEW SITE PLAN

Sheet Number:
C100



COUNTY OF HUMBOLDT
 ADA MODIFICATIONS

Revisions:

Client Number: 2018-201
 Project Number: 683.00
 Date: Nov. 28, 2018


Sheet Title:
 PARTIAL ENLARGED SITE PLANS

Sheet Number:


C101

KEY NOTES:


- 1- PROVIDE A SMOOTH TRANSITION FROM NEW CONCRETE TO EXISTING AND/OR NEW ASPHALT PAVING, SAME ELEVATION
- 2- PROVIDE A SMOOTH TRANSITION FROM NEW ASPHALT TO EXISTING ASPHALT PAVING, MATCH SAME ELEVATION
- 3- PROTECT EXISTING FEE COLLECTION BOX DURING INSTALLATION OF NEW CONCRETE SLAB-ON-GRADE
- 4- PROTECT EXISTING SIGNAGE BOARD DURING INSTALLATION OF NEW CONCRETE SLAB-ON-GRADE
- 5- NEW FREESTANDING ADA ACCESSIBLE DRINKING FOUNTAIN w/ BOLLARD PROTECTION. SEE DETAILS 8/C501 & 9/C501
- 6- INTERNATIONAL SYMBOL OF ACCESSIBILITY, SEE DETAIL 14/C501
- 7- PROVIDE TRUNCATED DOME RECESS IN NEW CONCRETE 36" DEEP EXTENDING FULL WIDTH OF CONCRETE WALK PER 11B-705.1.2.3, SEE DETAIL 7/C501
- 8- NEW UNAUTHORIZED VEHICLE PARKING SIGNAGE, MATCH EXISTING, SEE DETAIL 6/C501
- 9- CONCRETE WALK, MAX. SLOPE 1:20 IN ACCESSIBLE ROUTE PATH, MAX. CROSS SLOPE 1:48, SEE DETAIL 3/C501
- 10- MAXIMUM SLOPE OF NEW ASPHALT IN EACH DIRECTION EQUALS 1:48, TRANSITION NEW ASPHALT DOWN TO EXISTING ASPHALT AT 1:48 MAX. SLOPE
- 11- 60" TURNING RADIUS TO MAINTAIN 1:48
- 12- NEW ADA ACCESSIBLE PICNIC TABLE, MOVABLE
- 13- PROVIDE NEW STEEL DRUM INSERT (6 GA.), RECESSED IN CONCRETE SLAB
- 14- NEW CONCRETE SLAB-ON-GRADE, MAX. SLOPE 1:48 IN ALL DIRECTIONS, SEE DETAIL 1/C501
- 15- CONCRETE WHEEL STOP. SEE DETAIL 8/C501
- 16- NEW ADA ACCESSIBLE PARKING SIGNAGE, SEE DETAIL 6/C501
- 17- ACCESS AISLE SHALL BE MARKED WITH A BLUE (FS15090) PAINTED BORDERLINE AROUND PERIMETER OF ACCESS AISLE. STRIPING INSIDE ACCESS AISLE SHALL BE 4" WIDE AND 36" O.C., PAINTED WHITE
- 18- 12" HIGH WHITE PAINTED LETTERING
- 19- PAINT A 4" WIDE BLUE (FS15090) STRIPE, (3) SIDES OF PARKING SPACE
- 20- NEW UNAUTHORIZED VEHICLE PARKING SIGNAGE (MATCH EXISTING) AND INTERNATIONAL SYMBOL OF ACCESSIBILITY SIGNAGE, SEE DETAIL 5/C501
- 21- PROVIDE TRUNCATED DOME RECESS IN NEW CONCRETE 60" DEEP EXTENDING FULL WIDTH OF CONCRETE WALK, SEE DETAIL 7/C501

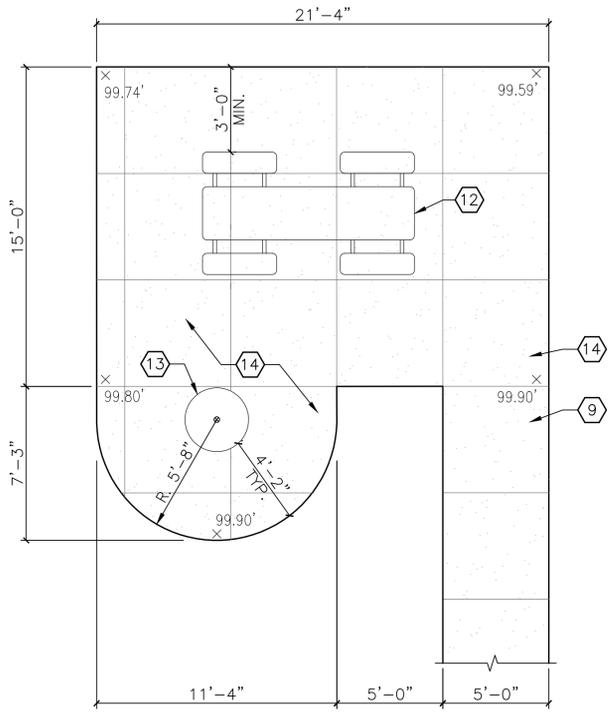


PLAN NORTH
4 PARTIAL ENLARGED SITE PLAN
 1/4" = 1'-0"
 0 2' 4' 8'

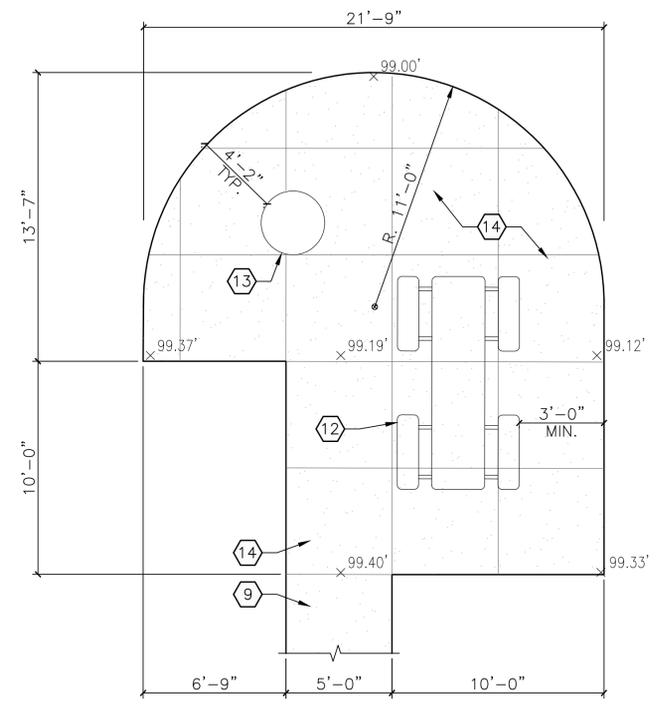


PLAN NORTH
1 PARTIAL ENLARGED SITE PLAN
 1/4" = 1'-0"
 0 2' 4' 8'

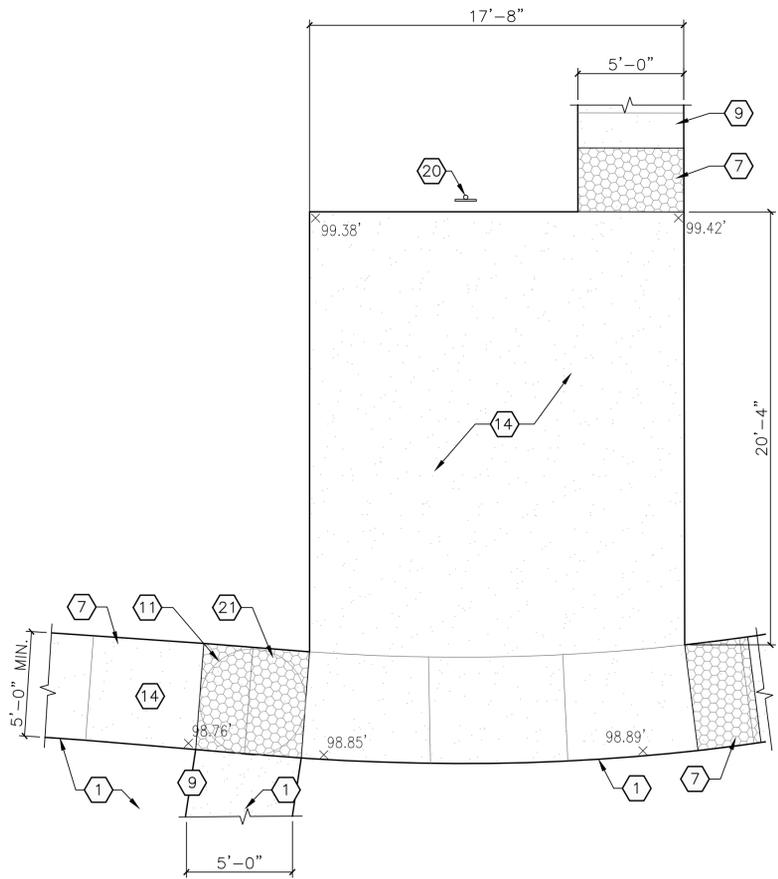


PLAN NORTH
5 PARTIAL ENLARGED SITE PLAN
 1/4" = 1'-0"
 0 2' 4' 8'

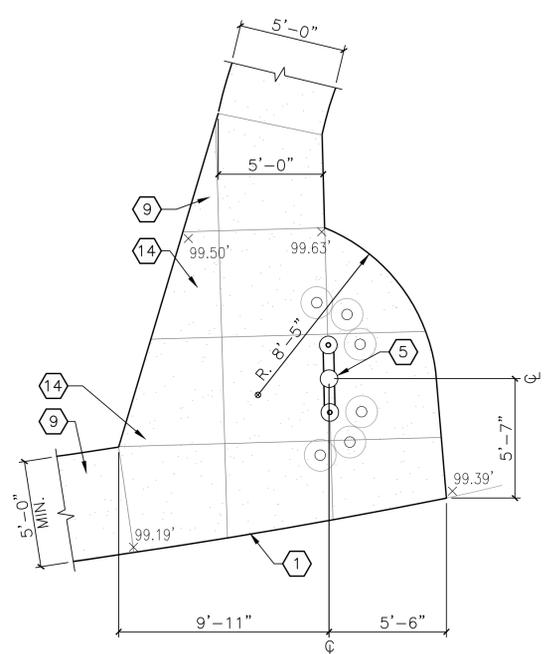


PLAN NORTH
3 PARTIAL ENLARGED SITE PLAN
 1/4" = 1'-0"
 0 2' 4' 8'

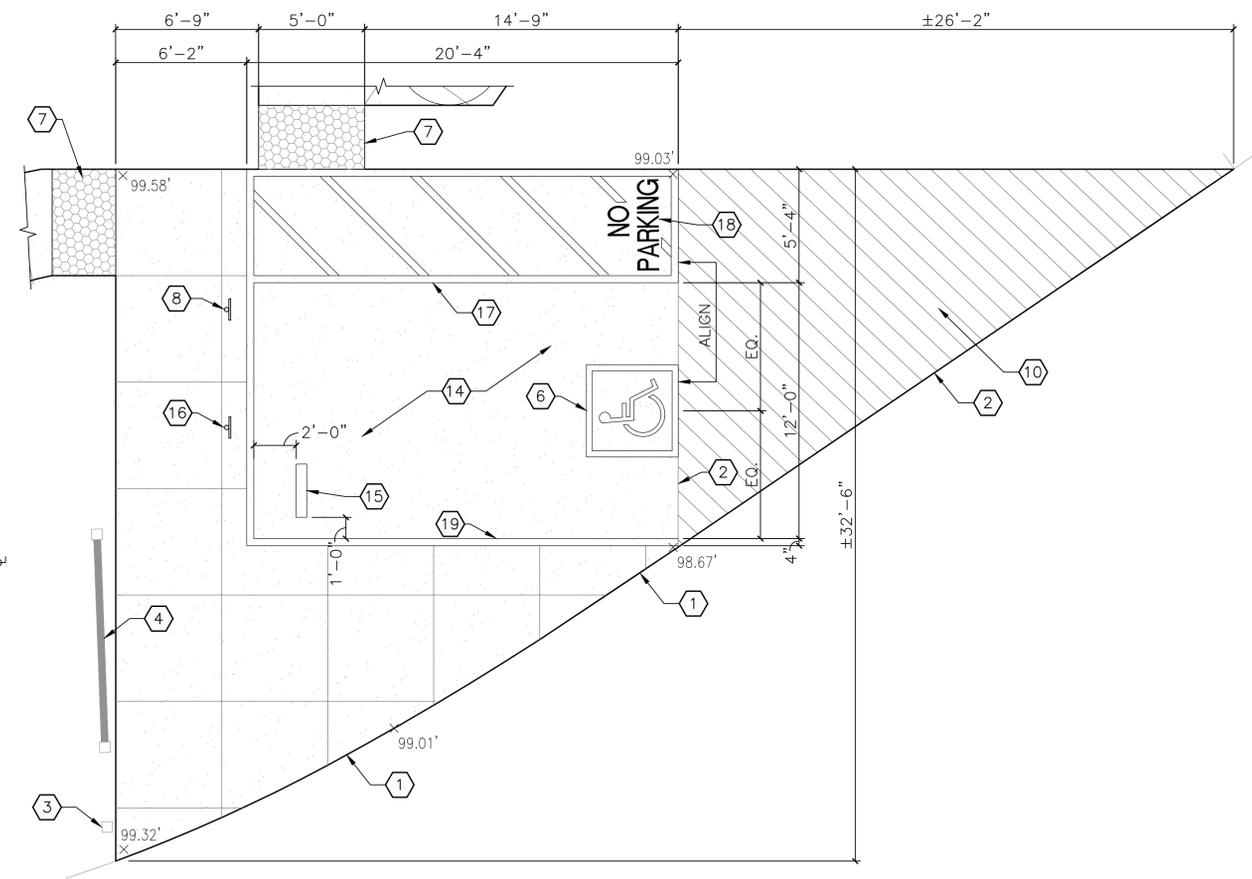


PLAN NORTH
2 PARTIAL ENLARGED SITE PLAN
 1/4" = 1'-0"
 0 2' 4' 8'

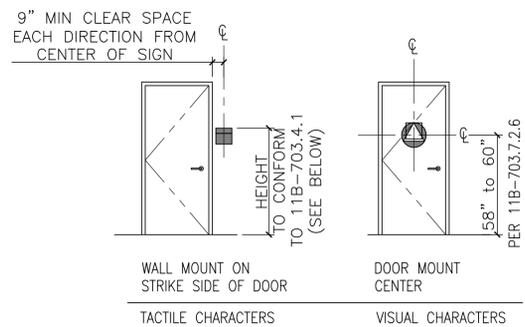


11B-703.4.1: TACTILE CHARACTERS ON SIGNS SHALL BE LOCATED 48 INCHES MINIMUM ABOVE FINISHED FLOOR OR GROUND SURFACE, MEASURED FROM THE BASELINE OF THE LOWEST BRAILLE CELLS AND 60 INCHES MAXIMUM ABOVE THE FINISH FLOOR OR GROUND SURFACE, MEASURED FROM THE BASELINE OF THE HIGHEST LINE OF RAISED CHARACTERS.

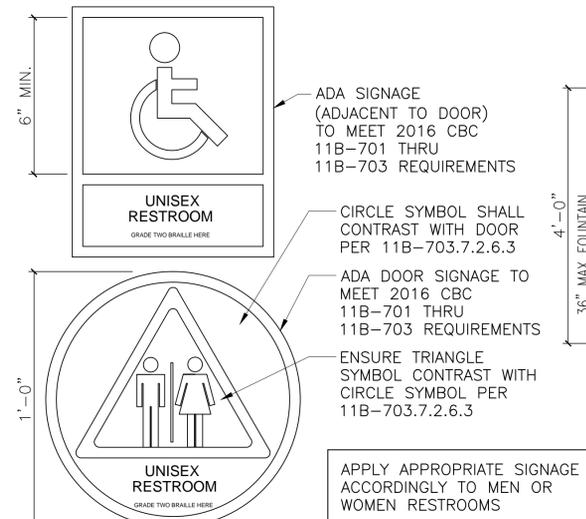


12 TYPICAL SIGNAGE AT BUILDING
 NOT TO SCALE

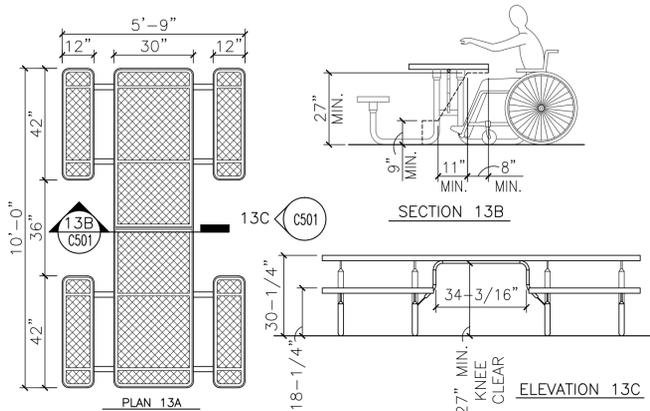


13 ACCESSIBLE PICNIC TABLE
 3/8" = 1'-0"

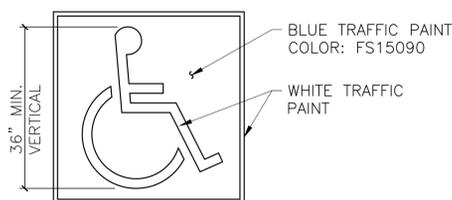


14 ACCESSIBLE PARKING STALL EMBLEM
 NOT TO SCALE

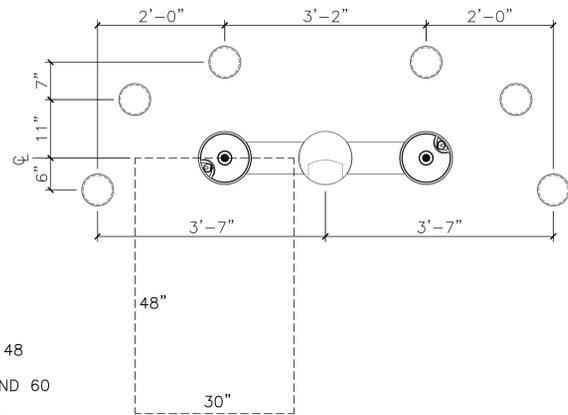


8 PLAN AT DRINKING FOUNTAIN
 3/4" = 1'-0"

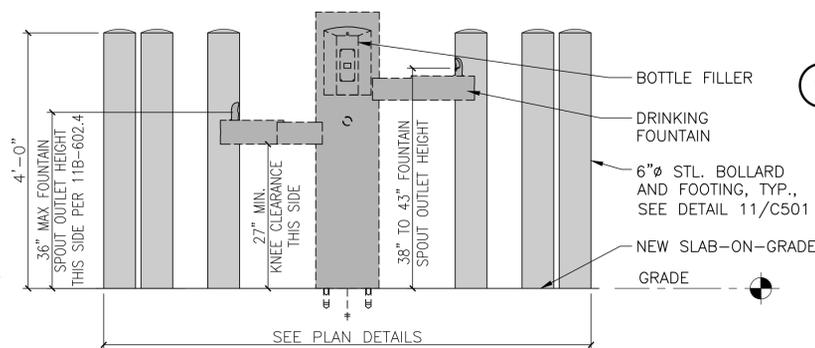


9 ELEVATION AT DRINKING FOUNTAIN
 3/4" = 1'-0"

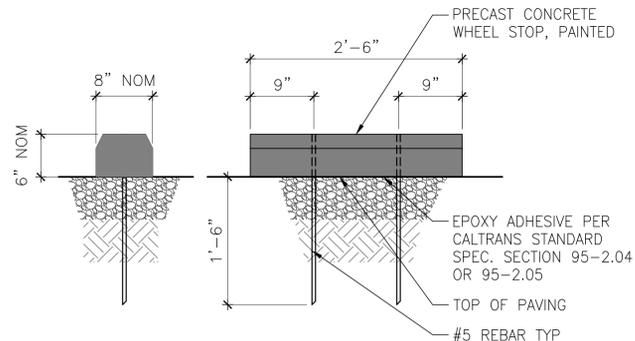


10 TYPICAL WHEEL STOP
 NOT TO SCALE

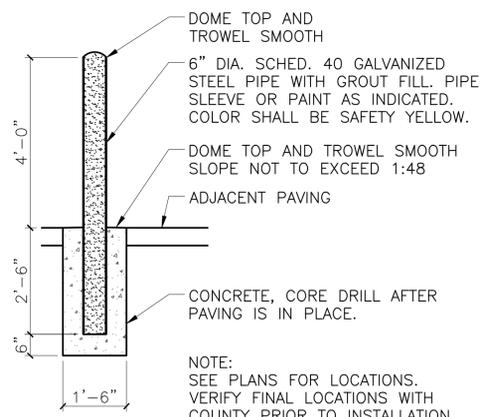


11 STEEL PIPE BOLLARD
 NOT TO SCALE

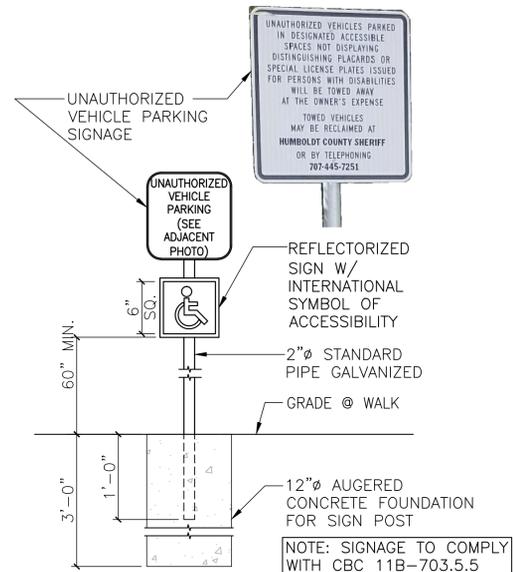


5 PARKING SIGNAGE AT CAMPSITES
 NOT TO SCALE

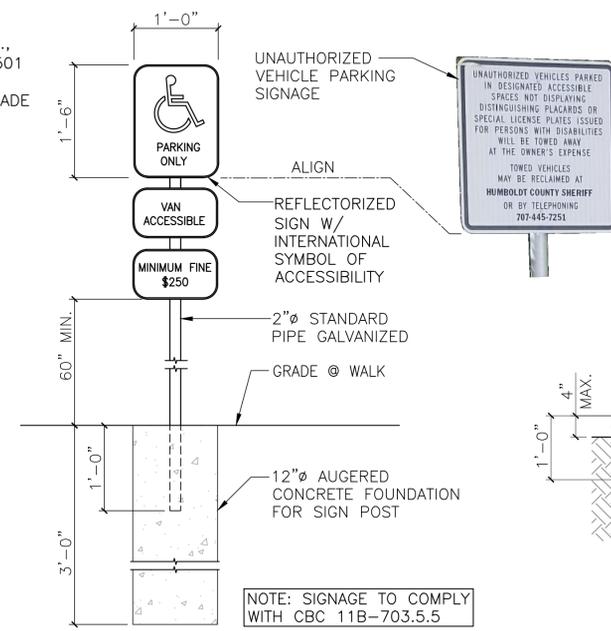


6 ACCESSIBLE PARKING SIGNAGE
 NOT TO SCALE

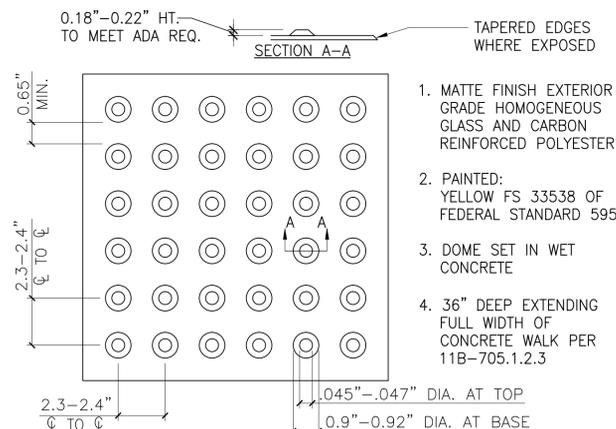


7 TRUNCATED DOMES
 NOT TO SCALE

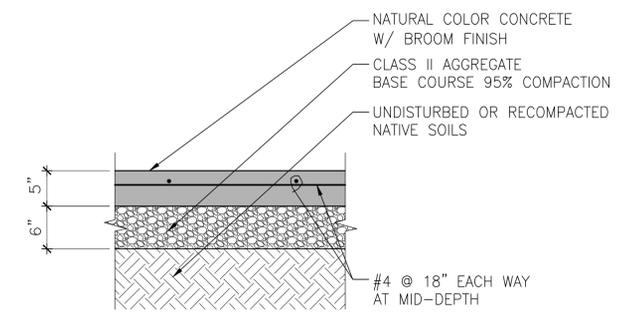


1 TYPICAL CONCRETE SLAB-ON-GRADE
 NOT TO SCALE

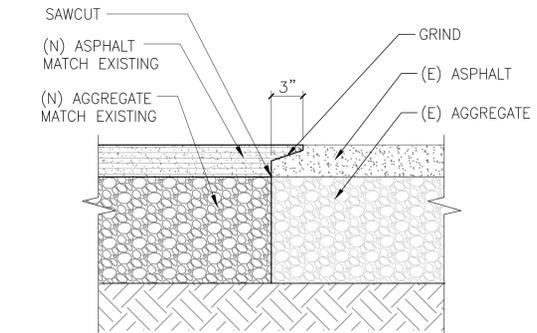

2 TYPICAL NEW TO EXISTING PAVING
 NOT TO SCALE

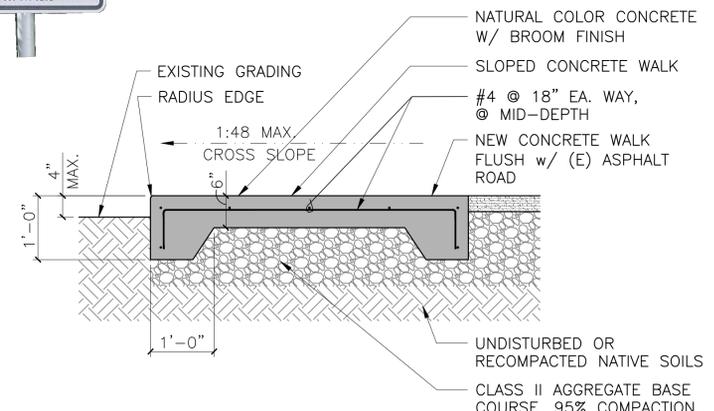

3 CONCRETE WALK
 3/4" = 1'-0"

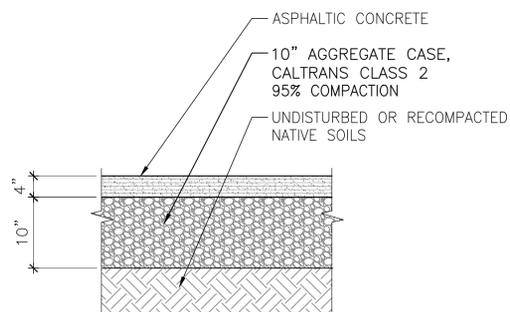

4 TYPICAL ASPHALT PAVING
 NOT TO SCALE



COUNTY OF HUMBOLDT
 ADA MODIFICATIONS

Revisions:

Client Number: 2018-201
 Project Number: 683.00
 Date: Nov. 28, 2018

Sheet Title:
DETAILS

Sheet Number:

C501