

**RESOLUTION OF THE ZONING ADMINISTRATOR
OF THE COUNTY OF HUMBOLDT**

Resolution Number: 25-055

Record Number PLN-2025-19193

Assessor's Parcel Number 207-035-001

Making the required findings for certifying compliance with the California Environmental Quality Act and conditionally approving the Degnen-Hansen Pit Conditional Use/Mining Permit and Reclamation Plan 15-year Reapproval

WHEREAS, Humboldt County Department of Public Works staff submitted an application and evidence in support of approving a recently expired 15-year terms of the Degnen-Hansen Pit Conditional Use/Mining Permit and Reclamation Plan (CUP-03-093XX/SMP-03-93XX); and

WHEREAS, the Humboldt County Planning Division has reviewed the submitted application, PLN 2025-19192, and evidence and has referred the application and evidence to reviewing agencies for site inspections, comments and recommendations; and

WHEREAS, the Humboldt County Planning Division has reviewed the submitted application and evidence to involved reviewing agencies for site inspections, comments and recommendations; and

WHEREAS, a Mitigated Negative Declaration was adopted for the original permit in 1994, a Subsequent Mitigated Negative Declaration was adopted for the permit renewal in 2010, and no changes are proposed to the approved permits, therefore no additional environmental review is required; and

WHEREAS, the Humboldt County Planning Division staff report includes evidence in support of making all of the required findings for approving the proposed 15-year renewal of the surface mining operation; and

WHEREAS, on August 21, 2025, a public hearing was held to receive public testimony on the proposed project.

THEREFORE, BE IT RESOLVED, that the Zoning Administrator makes all the following findings:

- 1. FINDING:** **Project Description:** Reapproval of a 15-year term of a previously approved, existing surface mining rock pit. The operation includes annual extraction and processing of up to 25,000 cubic yards (cy) of material with a total amount not to exceed 40,370 cy over 15 years. No changes to the extraction volume, location or Reclamation Plan is proposed. The annual volume, locations and extraction methods will

be consistent with the prior approval and other regulatory agencies.

EVIDENCE: a) Project File: PLN-2025-19193

2. FINDING: **CEQA.** The project complies with the requirements of the California Environmental Quality Act. The Humboldt County Zoning Administrator has considered the Mitigated Negative Declaration previously adopted for the original project in 1994, and the Subsequent Mitigated Negative Declaration adopted for the project renewal in 2010 pursuant to Section 15164 of the CEQA guidelines

EVIDENCE: a) The project was previously subject to CEQA review, mitigation measures were incorporated and are now part of the project.

b) No expansion is proposed; no changes are proposed.

c) The project is subject to review and approval by the County and other affected agencies annually.

Conditional Use Permit (*Title III, Div. 1, Chapter 2, §312-17.1, Required Findings, of the Humboldt County Code*)

3. FINDING: The proposed development is in conformance with the County General Plan.

EVIDENCE: a) Mining permits are conditionally permitted in all land use and zoning designations (2017 General Plan, Chapter 10, Mineral Resources, Section 10.4.4, Surface Mining Standards).

4. FINDING: The proposed development is consistent with the purposes of the existing zone in which the site is located.

EVIDENCE: a) Mining permits are conditionally permitted in all land use and zoning designations (Humboldt County Code (HCC), Section 391-1, Surface Mining Ordinance). Final reclamation will return the land consistent with surrounding rural residential and agricultural uses.

5. FINDING: The proposed development conforms with all applicable standards and requirements of these regulations.

EVIDENCE: a) Notwithstanding the requirement for a Conditional Use Permit for the removal of natural material for commercial purposes for inland areas, and compliance with the development standards of the base and combining zones, general regulations applicable to all zones, several

zones and special areas as listed apply to the project. These regulations are contained in the County's Mining Ordinance (HCC Section 391-1 *et seq.*) and require that:

- The proposed surface mining operation incorporates adequate measures to mitigate the probable or known significant environmental effects caused by the proposed operation.
- The proposed surface mining operation and use is properly located in accordance with the General Plan and any relevant element thereof, to the community as a whole, and to other land uses in the vicinity.

These findings are largely incorporated within plan conformance findings for Conditional Use Permits and as directed under CEQA.

In addition to the above approval criteria, HCC Section 313-61.2.6 establishes mining permit standards above and beyond that minimally required under SMARA. These standards include:

- All private encroachments leading to a surface mining operation shall be adequately surfaced to prevent aggregate or other materials from being drawn into the public way.
- All haul roads and driveways shall be maintained as necessary to minimize the emission of dust and prevent the creation of a nuisance to adjacent properties.
- Any water discharges from the mined lands shall meet all applicable water quality standards of the Regional Water Quality Control Board and other agencies with authority over such discharges.
- Adequate measures shall be taken to assure the prevention of erosion from mined lands and adjacent properties during the life of the operation. The reclamation plan shall insure the prevention of erosion subsequent to surface mining operations.
- Unless specifically authorized for the purposes of environmental enhancement by the California Department of Fish and Wildlife (and the U.S. Army Corps of Engineers, if necessary), grades and land forms in mined lands shall be maintained in such a manner so as to avoid accumulations of water that will serve as breeding areas for mosquitoes or sites for fish entrapment.

- Excavations, which could affect groundwater, shall not substantially reduce the quality or quantity of groundwater available in the area surrounding the mined lands.
- Surface mining operations in areas where other agencies have regulatory jurisdiction shall be operated so as to comply with all applicable rules and regulations.

Based on information contained in the application and environmental documentation, the project has been designed or is being conditioned to assure compliance with these standards.

The proposed development and conditions under which it may be operated or maintained will not be detrimental to the public health, safety, or welfare, or materially injurious to properties or improvements in the vicinity.

See Findings and Evidence for Approving Reclamation Plans, below.

Conditional Use Permit for Surface Mining (*Title III, Div. 9, Chapter 1, §391-4(b)(3)(a) and (b), Procedure for Review and Action on Applications, of the Humboldt County Code*)

The application package adequately describes the proposed surface mining operations and adequate measures are incorporated to mitigate significant environmental effects which may be caused by the proposed operation.

The application is for reapproval of a mining permit for continued quarry mining operations. The 15-year term of the prior approval expired prior to submitting application for renewal. A Mitigated Negative Declaration was adopted in 1994 for the original permit approval and a Subsequent Mitigated Negative Declaration (SMND) was adopted in 2010 for a 15-year permit renewal. The SMND included mitigation measures that along with the original conditions of approval were incorporated into the project and are, in effect, part of the project that is being considered. These measures have been and will continue to be in force and monitored annually by County Planning staff. There are no changes in operations, law, or the environment that warrant further environmental review. The requested permit renewal can be found exempt from the California Environmental Quality Act (CEQA) as a Class 1 Categorical Exemption, Existing Facilities.

The proposed use and location of the surface mining operation is properly located in accordance with the General Plan.

Mining permits are conditionally permitted in all land use and zoning designations (2017 General Plan, Chapter 10, Mineral Resources, Section 10.4.4, Surface Mining Standards).

15-Year Permit Term (*Title III, Div. 9, Chapter 1, §391-4(b)(6), Term, of the Humboldt County Code*)

The life expectancy of the operation justifies a 15-year term.

The quarry is bowl-shaped, cut into the hillside, with a face about 150' long by 30' high. The historical extraction amount and the size of the quarry indicates there is at least 15,000 cubic yards of material remaining.

There are no special circumstances related to the operation that would cause the term to be set for less than 15 years.

Referral notices were sent to regulatory agencies, and no agency indicated that the term should be less than 15 years. County staff are not aware of any special circumstances that should limit the term.

The mine has been conducted in compliance with permit conditions.

The operation has been inspected annually by County Planning staff for compliance with the Reclamation Plan and conditions of approval and mitigation measures. The most recent inspection report from October 2024 shows no violations or issues.

Existing Mitigation Measures and Conditions reduce environmental impacts to less than significant and all impacts are addressed.

Following review of relevant regulations and consultation with interested agencies, there are no changes in the law or circumstances that warrant additions or changes to conditions or mitigation measures.

Reclamation Plan (*Title III, Div. 9, Chapter 1, §391-5(b)(2), Approval, of the Humboldt County Code*)

Public Resources Code (PRC) Sections 2772, 2773 and 2774 specify the information and documents required for all reclamation plans.

The full contents to satisfy required Findings A through P are found in the Reclamation Plan for the Fort Seward Quarry submitted for this project, unless otherwise noted.

The name and address of operator and agent.

Page 4 of Reclamation Plan (RP) -

Operator/Agent: Humboldt County Department of Public Works (HCPW), 1106 Second Street, Eureka, CA 95501

The names and addresses of the owners of all surface and mineral interests of such lands.

Page 4 of RP -

Hansen-Degnen Properties, 615 Main Street, Sausalito, CA 94965

The anticipated quantity and type of minerals for which the surface mining operation is to be conducted.

Page 4 of RP -

Gravel extractions as large as 25,000 cubic yards, or smaller extractions, as frequently as annually, totaling 40,370 cy over 15 years.

The proposed dates for the initiation and termination of such operation.

Page 4 of RP -

Date of start-up 1976.; estimated date of closure 2040. The Surface Mining Ordinance allows for up to a 15-year permit term subject to future extensions.

The maximum anticipated depth of the surface mining operation.

Page 4 of RP -

90 feet.

The size and legal description of the lands that will be affected by such operation.

Page 4 of RP -

Size: Total area to be disturbed and reclaimed 4.0 acres.

Legal Description: Within Section 22, T2N, R3E, H.B. & M.

A map that includes the boundaries and topographic detail of such lands, the location of all streams, roads, railroads, and utility facilities within, or adjacent to, such lands, the location of all proposed access roads to be constructed in conducting such operation,

Pages 26-30 of RP -

Project Vicinity, Project Location, Mining Plan (Aerial Photograph), Site Plan (Process Site Close-Up), Proposed Final Reclamation Plan.

A description of the general geology of the area, a detailed description of the geology of the area in which surface mining is to be conducted,

Page 10 of RP -

The quarry lies within a region of Franciscan sandstone made up chiefly of greywacke and interbedded siltstone with minor conglomerate.

A description of and plan for the type of surface mining to be employed and a time schedule that will provide for the completion of surface mining on each segment of the mined lands so that reclamation can be initiated at the earliest possible time on those portions of the mined lands that will not be subject to further disturbance by the surface mining operation

Page 11-12 of RP -

As quarrying has advanced into the hill and the processing/stockpiling areas has subsequently been expanded, preliminary reclamation specific to the south end of the site will begin in the near future. The landowner anticipates post reclamation land will include using the site as a "borrow pit" for logging and ranch roads.

A description of the proposed use or potential uses of the land after reclamation and evidence that all owners of a possessory interest in the land have been notified of the proposed use or potential uses.

Page 12-13 of RP -

The landowner anticipates post reclamation land will include using the site as a "borrow pit" for logging and ranch roads.

A description of the manner in which contaminants will be controlled, and mining waste will be disposed.

Page 13-14 of RP -

There are no contaminants associated with this operation. Equipment will be inspected for leaks prior to starting each shift, following lunch breaks, and at end of shift each workday. Maintenance involving the removal/repair of hydraulic cylinders/hoses or of reservoirs containing hazardous products will be performed over impervious fabric resistant to total petroleum hydrocarbons.

A description of the manner in which rehabilitation of affected streambed channels and streambanks to a condition minimizing erosion and sedimentation will occur.

Page 17 of RP -

There are no watercourses in the quarry. Final grading of the quarry face and floor will direct stormwater runoff to a retention areas or saturation trench at the base of the face where runoff will collect onsite and evaporate or percolate into the grounds.

An assessment of the effect of implementation of the reclamation plan on future mining in the area.

Page 12-13 of RP -

The landowner anticipates the site will be used as a "borrow pit" after HCPW ceases its use of the quarry.

A statement that the person submitting the reclamation plan accepts responsibility for reclaiming the mined lands in accordance with the reclamation plan.

Page 23 of RP -

The Statement of Responsibility follows County accepted form and content for such acknowledgments.

A cost estimate prepared by a qualified individual for financial assurances to ensure reclamation is performed in accordance with the reclamation plan.

Pages 11 of RP -

A Cost estimate was provided with the reapplication and will be updated yearly consistent with SMARA. Financial Assurances to ensure reclamation is performed in accordance with the approved reclamation plan shall be entered into with the County of Humboldt and the Department of Conservation per PRC Section 2773.1.


DECISION

NOW, THEREFORE, based on the above findings and evidence, the Humboldt County Zoning Administrator does hereby:

- Adopt the findings set forth in this resolution; and
- Approve the Degnen-Hansen Pit Conditional Use/Mining Permit and Reclamation Plan for a 15-year term.

Adopted after review and consideration of all the evidence on **August 21, 2025**.

I, John H. Ford, Zoning Administrator of the County of Humboldt, do hereby certify the foregoing to be a true and correct record of the action taken on the above-entitled matter by said Zoning Administrator at a meeting held on the date noted above.

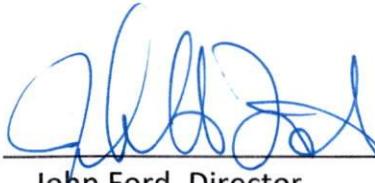

John Ford, Director
Planning and Building Department

ATTACHMENT 1A
CONDITIONS OF APPROVAL
PLN-2025-19193, CA MINE ID #91-12-0028

APPROVAL OF THE SURFACE MINING PERMIT, CONDITIONAL USE PERMIT, AND RECLAMATION PLAN RENEWAL IS CONDITIONED ON THE FOLLOWING TERMS AND REQUIREMENTS:

A. Conditions of Approval:

1. **The terms of the Conditional Use/Surface Mining Permit and Reclamation Plan shall be fifteen (15) years and shall expire on August 21, 2040.** The applicant may renew the use permit and/or reclamation plan by submitting appropriate forms and fees prior to expiration in effect at the time of renewal.
2. Financial Assurances to ensure reclamation is performed in accordance with the approved reclamation plan shall be entered into with the County of Humboldt and the Department of Conservation per PRC Section 2773.1.
3. The applicant shall submit a "wet signed" statement naming the person or persons who accept responsibility for reclaiming the mined lands in accordance with the approved reclamation plan and PRC Section 2772.
4. The applicant shall reimburse the Planning Division for any processing costs that exceed the application deposit.
5. If applicable, pursuant to the California Code of Regulations Section 3697, the owner or operator of a newly permitted operation shall submit an initial report and reporting fee to the Department of Conservation (DOC) after permit approval. The DOC has developed the New Mining Operation Report form; please contact DOC at (916) 323-9198 to obtain a form. The condition shall be satisfied by submitting to the County the completed yellow Lead Agency copy of the New Mining Operation Report form.
6. The project shall comply with the requirements of the US Army Corps of Engineers, NOAA Fisheries, US Department of Fish and Wildlife, California Department of Fish and Wildlife, North Coast Air Quality Management District and other County, State and Federal agencies having jurisdiction, and shall submit written documentation to Community Development Services that the clearances from agencies have been obtained.

7. The applicant shall record a *Notice of Reclamation Plan Approval* for the approved reclamation plan at the Humboldt County Recorder's Office in accordance and PRC Section 2772.7.
8. The project shall be consistent with the Streamside Management Area Ordinance and with the standards and policies set forth in the General Plan, *Sensitive and Critical Habitats*. Furthermore, no debris, soil, silt, or other such foreign substance shall be allowed to enter into or be placed where it may be washed by rainfall or runoff into waters of the State. When operations are completed, any excess materials or debris shall be removed from the work area.

B. Operation Restrictions:

1. The mining operator shall adhere to the approved reclamation plan and mitigation monitoring program, as applied to the mining extraction site proper, and other support and ancillary uses and facilities (i.e., stockpiles, and the maintenance of access road drainage culverts). This shall include the operations included herein setting forth routine (i.e., non-emergency) days and hours of operations. The reclamation plan shall be reviewed annually by the operator and county staff to assure that any required reclamation is completed and is in compliance with the approved reclamation plan. Any substantial changes to the reclamation plan, including changes necessitated or required by changes in the environment, may require review by the Division of Mines and Geology, Reclamation Program, and approval by the County.
2. The applicants/operators shall abide at all times with the Humboldt County Surface Mining Regulations, and any revisions thereto, and the State Surface Mining and Reclamation Act, and any revisions thereto.
3. The operator shall be responsible for submitting to the State Department of Conservation, on forms provided by the State Department of Conservation, an annual report per PRC Section 2207.
4. Hauling along public roads shall be limited to "legal loads" only. "Overweight loads" must have prior approval from the Department of Public Works and/or CalTrans.
5. Any and all portable toilet facilities shall be adequately maintained by a licensed septic tank pumper to the satisfaction of the County Department of Environmental Health.

6. All surface mining operations involving unpaved roads shall adhere to the provisions for control of dust emissions from roads.
7. The operator shall maintain erosion control and sedimentation measures as described in the Reclamation Plan and Addendum to thereto.
8. The floor of the working and staging areas shall slope a minimum of 2% into the working face to contain runoff water on site.
9. No new access roads shall be constructed without prior approvals.
10. No riparian vegetation shall be removed without prior approvals.
11. Hours of Operations shall typically be Monday through Friday during daylight hours, generally 6:00 am to 6:00 pm; with blasting from 8:00 am to 5:00 pm. These hours do not apply to emergency road repair situations. Any substantial changes to the hours of operation shall be preapproved by the Planning Department.
12. Wet weather operations shall be consistent with the Storm Water Pollution Prevention Plan. No equipment shall be allowed on winterized portions of the site during wet conditions to the satisfaction of the California Department of Fish and Wildlife.
13. Blasting, if applicable, shall be restricted between the hours 8:00 am to 5:00 pm, Monday through Friday, with no blasting on Saturday. The applicant shall be responsible for providing 24-hour advance notice of any blasting to all interested parties who have previously requested, in writing, such advance notice.
14. Operational noise levels and particulate settlement patterns shall be measured by the applicant on demand by the County Planning Director, as necessary, to verify that the project is operating at environmentally acceptable levels per Humboldt County Code.
15. The project shall comply with the requirements of the US Army Corps of Engineers, NOAA Fisheries, US Department of Fish and Wildlife, California Department of Fish and Game, North Coast Air Quality Management District, and other County, State and Federal agencies having jurisdiction, and shall submit written documentation to Community Development Services that the clearances from agencies have been obtained.

16. The project shall be consistent with the Project Description, Site Plan, Plan of Operations, Reclamation Plan and Mitigation Measures as approved by the Planning Commission. Modification to the project requires review and approval by the Planning Department.

C. Informational Notes:

1. Surface mining operations are regulated by various different state and federal agencies. Each of these agencies is responsible for regulating a specific aspect of the mining operation. For example, the Department of Fish and Wildlife is responsible for assuring that fish and wildlife resources are not negatively impacted by a surface mining operation; the Army Corps of Engineers is responsible for regulating discharges into navigable waters of the United States; the Regional Water Control Board oversees waste discharge requirements; CalTrans assures that no State bridges or highways are negatively affected by mining operations, and; the State Lands Commission regulates activities on lands within the public trust. Other agencies which may have jurisdiction over a surface mining operation include but are not limited to, California Department of Conservation, Division of Mines & Geology; North Coast Unified Air Quality Management District; California Coastal Commission; National Marine Fisheries; United States Fish & Wildlife Service; and Cal OSHA.

The operator is responsible for contacting all of the above regulating agencies to assure conformance by the surface mining operation with these agencies regulations.

2. The Financial Assurance shall be subject to annual review and adjustments to account for: a) changes in the costs of reclamation due to inflation; b) lands reclaimed in the previous year and not involving future reclamation; and c) additional lands requiring reclamation in the next year.
3. Building permits are required for all equipment structural pads/foundation buildings, and all structural concrete work (i.e. scales) that are not pre-existing.
4. A National Pollution Discharge Elimination System (NPDES) General Permit for Storm Water Discharges Associated with Construction Activity is required unless the applicant demonstrates that there is no storm water runoff from the quarry site. If there are such discharges the applicant shall contact the Regional Water Quality Control Board for permitting requirements.

5. If the project involves the storage and handling of hazardous materials, the applicant shall submit and have approved by the Division of Environmental Health (DEH) a hazardous materials business plan and comply with the conditions of DEH.

PLAN OF OPERATION

Hansen Quarry
California Mine ID #91-12-0028
(Updated 3/4/2025)



Introduction

The project is continued extraction, crushing, and stockpiling of rock from the Hansen quarry for County road maintenance and repair projects in the area. This permit application proposes continued extraction of up to 25,000 cubic yards (cy) as frequently as annually over the next 15 years. The total volume extracted will not exceed 40,370 cy.

Location

The Hansen quarry is located 6.2 miles north of Bridgeville on Kneeland Road (Attachment 5). It is in Section 22, Township 2 North, Range 3 East, HB&M and can be seen on the Yager Junction 7.5' USGS quadrangle map. The quarry is located on Assessor Parcel #207-036-01.

Past Mining Activities

The surface mining permit issued in 1994 (Permit #CUP-03-93/SMP-03-93) approved the mining of rock from a previously existing rock quarry from 1994 to 2009. HCPW proposed to mine and crush 25,000 cy every three to five years. The volume of rock available in the quarry was estimated to be approximately 82,700 cy. Seven individual extractions worked into the face, removing a total of 42,330 cy of rock. The permit was renewed in 2009 for 25,000 cy as frequently as annually, not exceeding 40,370 cy in total, over the following 15 years. Since the permit renewal in 2009 no extraction has been performed.

Table 1 – Production

YEAR	VOLUME
1996	850 cy
1997	14,120 cy
2001	23,060 cy
2002	500 cy
2003	800 cy
2004	600 cy
2005	No production
2006	No production
2007	No production
2008	2,400 cy
TOTAL	42,330 cy

Crushing occurred during at least some of these extractions. The crushed rock was stockpiled on the quarry floor in two locations, on the north side where the access road enters the quarry, and in the southwest corner, at the end of the quarry face.

At this time the quarry face is approximately 300 ft long x 50 ft high with a lower face about 25 ft high. There is a 25 ft wide ramp that serves as a catch bench at the top of the lower face. The upper face is set back from the lower face by the ramp/bench and is also about 25 ft in height.

Proposed Mining Activities

HCPW proposes extraction of up to 25,000 cy of rock, as frequently as annually, for the next 15 years. The total volume extracted will not exceed 40,370 cy. Crushing and stockpiling are included in the proposed activities.

Rock Extraction

The mining method to be used will be consistent with how HCPW has conducted mining activities over the past 30 years (1994 and 2009 permit periods). Extraction will be accomplished by ripping and breaking up the rock with a bulldozer or excavator. The rock will be pushed into temporary stockpiles on the quarry floor for crushing. In the event localized hard rock is encountered, small-scale separation with charges may be performed. Rock extraction will work into the face by about 72 ft. Quarry face (high-wall) stability will be ensured by excavating the upper face into the hillside and maintaining a 25 ft wide catch bench at 25 ft up from the quarry floor. The horizontal alignment of the face will remain about the same.

Mining and crushing will be done during daylight hours (sunrise to sunset), primarily on weekdays. The average time period from extraction to stockpiling will be about six weeks. Dust control measures will consist of watering the quarry entrance, access road, and quarry floor as needed with a water truck using an offsite water source.

Rock Processing

A portable crusher assembly, consisting of jaw and cone crushers, conveyors, and a generator trailer will be temporarily located on the quarry floor. Rock from the temporary stockpiles will be transported to the crusher via front-end loader. Crushed rock will then be transferred to the permanent stockpiles. Once crushing activities are completed, the crusher assembly will be dismantled and removed from the area.

Traffic Control

Traffic control will consist of placing warning signs along Kneeland Road in both directions on either side of the quarry area. It will not be necessary to detour or otherwise restrict traffic. Minor traffic delays may occur as vehicles slow down when they encounter trucks entering or exiting Kneeland Road from the quarry. Delays will be temporary, ending when extraction and processing activities are completed and trucks/equipment leave the area.

General Extraction Details

Following each extraction, the quarry face will be left with a slope of varying steepness, in some places greater than 1:1 (where there are hard rock outcrops). The catch bench will be maintained at approximately 25 vertical feet. The floor will be regraded flat as necessary, with a depression located in the center where rainfall runoff from the face and floor will accumulate and evaporate or percolate into the ground. Containment berms will be repaired or reconstructed as necessary to keep runoff from leaving the site and draining into the unnamed tributary to Grizzly Creek, ~500 ft below the site. These berms will be revegetated as needed using fast-growing native grass seed and mulched.

Reclamation

Final Reclamation

No reclamation has been undertaken for the site. Final reclamation will be undertaken when mining is complete or the permit has expired. The amended Reclamation Plan calls for regrading the quarry face to a 1:1 slope with a catch bench at 25 vertical feet. The catch bench will be soiled and vegetated with native grasses. Additional reclamation activities may include removing the stockpiles, removing the containment berms, regrading and decompacting, topsoiling and revegetating the quarry floor, and decommissioning the existing access road. Final site end use and reclamation activities will be coordinated with the property owner. There is the possibility that the site will continue to be used for material stockpiling and equipment storage/staging after mining activities are complete. The Reclamation Plan may be modified and submitted for re-approval when the date of final mining activities is known.

Monitoring and Reporting Activities

Monitoring will consist of regular visual inspections of the quarry by HCPW personnel for slope stability, drainage, and berm integrity. The quarry will also be inspected annually by Humboldt County Planning Division staff. Reporting will consist of annual reports to the local lead agency and CA Department of Conservation as required by the Surface Mining and Reclamation Act.

Financial Assurance

The current financial assurance is included as an attachment to the permit renewal packet. No other changes to these amounts are proposed as no changes to the approved Reclamation Plan are proposed.



04.15.2009

FINAL RECLAMATION PLAN

**HANSEN QUARRY
(Humboldt County)
August 2009**

Amended March 2010

Prepared by:

**Humboldt County Department of Public Works
Natural Resources Division
1106 Second Street
Eureka, CA 95501
(707) 445-7741**

TABLE OF CONTENTS

OPERATOR	4
OWNER/SURFACE RIGHTS	4
GENERAL MINING OPERATION INFORMATION	4
MINED MINERAL COMMODITY	4
ESTIMATED TOTAL PRODUCTION	4
TOTAL ACRES TO BE DISTURBED.....	4
TOTAL ACRES TO BE RECLAIMED.....	4
MAXIMUM ANTICIPATED DEPTH OF MINING.....	4
DATE OF START UP	4
ESTIMATED PROPOSED DATE OF CLOSURE	4
LOCATION	4
SITE DESCRIPTION	5
DESCRIPTION OF ENVIRONMENTAL SETTING	7
AESTHETICS	7
AIR QUALITY & NATURALLY OCCURRING ASBESTOS.....	7
BIOLOGICAL RESOURCES – VEGETATION.....	7
BIOLOGICAL RESOURCES – WILDLIFE	8
CULTURAL RESOURCES	9
GEOLOGY	10
SOILS	10
NOISE	10
GENERAL LEAD AGENCY INFORMATION.....	10
LEAD AGENCY	10
STAFF CONTACT	10
PHONE NUMBER.....	10
ADDRESS	10
SURFACE MINING/CONDITIONAL USE PERMIT NUMBER.....	10
DATE ISSUED.....	10
EXPIRATION DATE	11
FINANCIAL ASSURANCES	11
DESCRIPTION OF MINING ACTIVITIES.....	11
QUARRYING	11
AGGREGATE PROCESSING.....	12
DUST SUPPRESSION.....	12
TRAFFIC CONTROL.....	12
FUELING AND MAINTENANCE.....	12
HAZARDOUS MATERIAL MANAGEMENT	13
ANNUAL WINTERIZATION ACTIVITIES	13
INTERIM MANAGEMENT PLAN	13
MONITORING AND REPORTING	13
INTERIM AND FINAL RECLAMATION	13
POST RECLAMATION LAND USE	14
RECLAMATION ACTIVITIES	14
TIME SCHEDULE.....	17
RECLAMATION PERFORMANCE STANDARDS	17
WILDLIFE HABITAT.....	17

BACKFILLING, REGRADING, SLOPE STABILITY, RECONTOURING.....	17
REVEGETATION.....	18
DRAINAGE.....	18
PRIME AGRICULTURAL LAND	18
OTHER AGRICULTURAL LAND	18
BUILDING, STRUCTURE, AND EQUIPMENT REMOVAL.....	18
SURFACE AND GROUNDWATER PROTECTION	19
TOPSOIL SALVAGE	19
TAILING AND MINE WASTE MANAGEMENT	19
CLOSURE OF SURFACE OPENINGS.....	19
SEDIMENT AND EROSION CONTROL PLAN	20
EROSION AND SEDIMENT CONTROL PRINCIPLES	20
DESIRED GOALS FROM IMPLEMENTING EROSION & SEDIMENT CONTROL MEASURES.....	21
EROSION & SEDIMENT CONTROL MEASURES	21
STATEMENT OF RESPONSIBILITY	23
ATTACHMENT 1 – Assessors Parcel Map.....	24
ATTACHMENT 2 – Location Map	25
ATTACHMENT 3 A – Vicinity Map.....	26
ATTACHMENT 3 B – Vicinity Map.....	27
ATTACHMENT 4 – Site Map	28
ATTACHMENT 5 – Proposed Final Reclamation Plan.....	29
ATTACHMENT 6 – Proposed Final Reclamation Cross Section.....	30

OPERATOR

Humboldt County Department of Public Works (HCPW)
1106 Second Street
Eureka, CA 95501

OWNER/SURFACE RIGHTS

Hansen-Degnan Properties
615 Main St.
Sausalito, CA 94965

GENERAL MINING OPERATION INFORMATION

Mined Mineral Commodity

Gravel

Estimated Total Production

Mining may consist of extractions as large as 25,000 yd³, or smaller extractions as frequently as annually, totaling 40,370 yd³ over 15 years.

Total Acres to be Disturbed

4.0 acres

Total Acres to be Reclaimed

4.0 acres

Maximum Anticipated Depth of Mining

90 feet (ft)

Date of Start Up

In use since at least 1976


Estimated Proposed Date of Closure

2024


LOCATION

The Hansen Quarry is located 6.2 miles north of Bridgeville on Kneeland Road. It is in Section 22, Township 2 North, Range 3 East, HB&M and can be seen on the Yager Junction 7.5' USGS quadrangle map. The quarry is located within Assessor Parcel #207-036-01. See Attachments 1, 2, 3A, and 3B.

Location Map

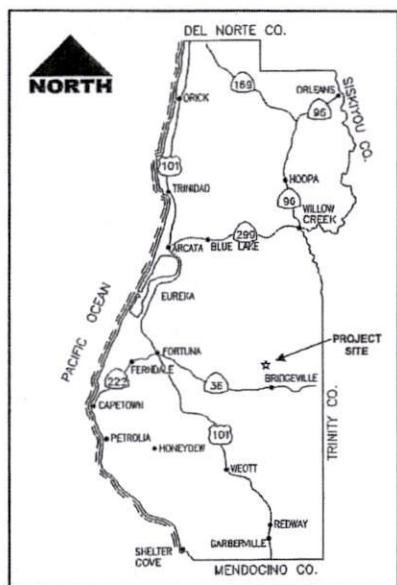

Vicinity Map

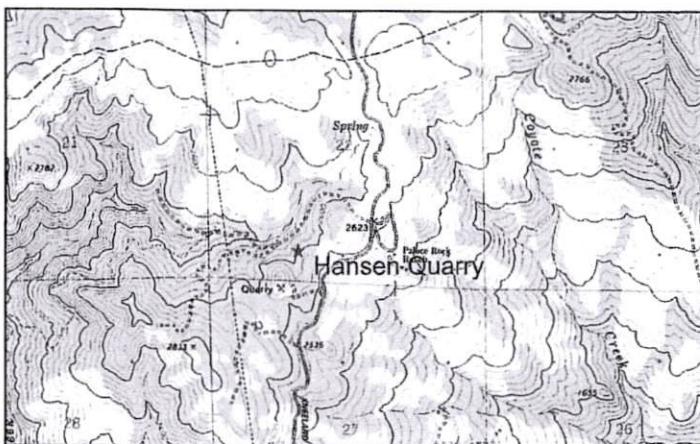

The pit was developed from a naturally occurring 90-ft high outcropping of rock. Operations from 1976 to 1993 removed approximately half of the original outcropping, creating the quarry face and floor. Currently the quarry face is approximately 300 ft long x 90 ft high with a lower face about 25 ft high. There is a 15 ft wide ramp that serves as a catch bench at the top of the lower face. The upper face is set back from the lower face by the catch bench and is about 65 ft in height. The quarry floor is about 1.3 acres in area, and the combined area of gravel stockpiles is about 0.7 acre.

Looking Northwest at Quarry Face (2009)




DESCRIPTION OF ENVIRONMENTAL SETTING

Aesthetics

The quarry is located on the northwest side of a hill and is not visible from Kneeland Road (on the backside of the hill). There are no residences or other structures visible from the quarry floor or catch bench.

Entrance to Quarry on Kneeland Road (2009)

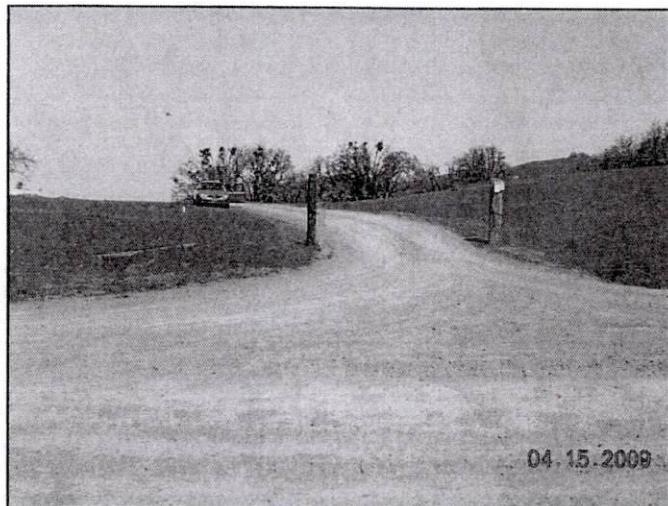

Air Quality & Naturally Occurring Asbestos

In 2002 the California Air Resources Board approved an Asbestos Airborne Toxic Control Measure (ATCM) for Construction, Grading, Quarrying, and Surface Mining Operations (Final Regulation Order Section 93105). The Hansen Quarry is not located in an ultramafic rock unit and does not appear to contain asbestos, serpentine, or ultramafic rock. If in the event naturally occurring asbestos (NOA) is discovered at the site, the North Coast Unified Air Quality Management District will be notified/consulted immediately. Stringent dust control measures will be applied during quarrying, processing/sorting, and stockpiling operations and during activities associated with final reclamation. If NOA is left exposed it will be encapsulated by re-soiling during final reclamation.

The North Coast Unified Air Quality Management District is in non-attainment for Particulate Matter smaller than 10 microns in diameter (PM10) according to State of California Standards. Sources of PM10 in the project vicinity are from road and natural airborne dust, vehicle emissions, and occasionally forest fires.

Biological Resources – Vegetation

There are no species of plants listed by the US Fish & Wildlife Service (USFWS) as threatened or endangered in the Yager Junction 7.5' quadrangle. The California Natural Diversity Database (CNDDB) contains records for three sensitive plant species (ranked 2.2 and 1B.2 by the

California Native Plant Society) and one lichen species in the area covered by the Yager Junction quadrangle.

**Rare/Sensitive Plant/Lichen Species
(Habitat in Project Area/Vicinity)**

SCIENTIFIC NAME	COMMON NAME	LISTING STATUS	CNPS RANK
<i>Erythronium revolutum</i>	coast fawn lily	Fed: None Cal: None	2.2
<i>Sidalcea Malviflora</i> ssp. <i>patula</i>	Siskiyou checkerbloom	Fed: None Cal: None	1B.2 (Fairly threatened in CA)
<i>Usnea longissima</i>	long-beard lichen	Fed: None Cal: None	N/A

(1B.2 = Rare, Threatened or Endangered in California and Elsewhere)

(2.X = Plants Rare, Threatened, or Endangered in California, But More Common Elsewhere)

Coast Fawn Lily – Coast fawn lily can be found in bogs and fens, broadleafed upland forest, and north coast coniferous forest. Coast fawn lily was documented in 2005 1.6 miles northwest of the quarry. The quarry does not contain habitat for coast fawn lily. However, there is habitat in the vicinity.

Siskiyou Checkerbloom – Siskiyou checkerbloom can be found in coastal prairies and upland forests, especially in disturbed areas. Siskiyou checkerbloom was documented in 2006 1.6 miles northwest of the quarry. Both the quarry and vicinity contain habitat for Siskiyou checkerbloom.

Long-Beard Lichen – Long-beard lichen can be found in north coast coniferous forest and broadleafed upland forest, on a variety of trees including big leaf maple, oaks, ash, Douglas fir, and bay. There are no documented occurrences of long-beard lichen in the quarry or vicinity. However, there is habitat for long-beard lichen in the vicinity of the quarry.

Biological Resources – Wildlife

The following species of wildlife are listed by USFWS as threatened or are candidates for listing for the Yager Junction 7.5' USGS quadrangle.

USFWS Species List for Yager Junction Quadrangle

SCIENTIFIC NAME	COMMON NAME	STATUS	CRITICAL HABITAT?
Fish			
<i>Oncorhynchus kisutch</i>	S. OR/N. CA coho salmon	Threatened (1997)	Yes (1999)
<i>Oncorhynchus mykiss</i>	Northern California steelhead	Threatened (2000)	Yes (2005)
<i>Oncorhynchus tshawytscha</i>	CA coastal chinook salmon	Threatened (1999)	Yes (2005)
Birds			

<i>Brachyramphus marmoratus</i>	marbled murrelet	Threatened (1992)	Yes (1996) Revision Proposed (2006)
<i>Coccyzus americanus</i>	western yellow-billed cuckoo	Candidate	No
<i>Strix occidentalis caurina</i>	northern spotted owl	Threatened (1990)	Yes (1992)
Mammals			
<i>Martes pennanti</i>	fisher, West Coast DPS	Candidate	No

There is no habitat for the listed fish species within the quarry (upland location).

Fisher – The quarry does not contain habitat for fishers, although there is fisher habitat in the vicinity of the quarry (undisturbed late-successional forest with rotting logs or tree cavities for nesting).

Western Yellow-Billed Cuckoo – There is no habitat for western yellow-billed cuckoos in the quarry or vicinity (dense willow and cottonwood stands on river floodplains).

Northern Spotted Owl – The quarry does not contain habitat for northern spotted owls. There is patchy and fragmented habitat in the vicinity (old-growth or mixed-age stands of mature and old-growth trees).

Marbled Murrelet – The quarry and vicinity do not contain habitat for marbled murrelets (old-growth forests with large trees and high canopy closure).

Review of occurrences of rare and sensitive wildlife species recorded in CNDDB (April 2009) for the Yager Junction 7.5' USGS quadrangle revealed two species of mammals.

**Rare/Sensitive Wildlife Species
(Habitat in Project Area/Vicinity)**

SCIENTIFIC NAME	COMMON NAME	LISTING STATUS
<i>Arborimus pomoe</i>	Sonoma tree vole	Fed: None Cal: None
<i>Martes americana humboldtensis</i>	Humboldt marten	Fed: None Cal: None

Sonoma Tree Vole – There is no habitat for Sonoma tree vole in the quarry area. There is habitat in the quarry vicinity (old growth and large second growth forests of Douglas fir, redwood, and montaine hardwood-conifer).

Humboldt Marten – The quarry does not contain habitat for Humboldt marten. However, the quarry vicinity contains habitat (late-successional coniferous forests with low overhead cover).

Cultural Resources

There are no known or recorded archaeological or historical sites at the quarry or in the vicinity.

Geology

The quarry lies within a region of Franciscan sandstone made up chiefly of greywacke and interbedded siltstone with minor conglomerate. These deposits occur predominantly as massive sandstone beds with thin siltstone interbeds which form moderate to steep, straight to convex slopes, sharp ridge crests and v-shaped canyons with a dense, coniferous timber cover. Slopes are generally stable, but prone to debris sliding along steep riverbanks and in steep headwater drainages.

The quarry is located in Earthquake Ground Shaking Zone E, Bedrock. Characteristics of earthquake shaking are higher accelerations but of relatively short periods and shorter duration of shaking, and high slope instability. The Freshwater Fault is approximately four miles west of the quarry.

Soils

Soil in the vicinity of the quarry are of the Hugo series, characterized by having a depth of three to four feet, moderately rapid permeability with good drainage, and with moderate erosion hazard. These soils are rated as highly suitable for timber production and of medium to low suitability for range use. There is minimal topsoil in the quarry area.

Noise

Ambient noise levels in the quarry vicinity range from 30 to 65 dBA, and result from wind, birds, livestock, and vehicular traffic (Jake Brakes) on Kneeland Road. Noise contribution from quarry activities are in the low-80s dBA range, which is typical for this type of activity, with the loudest noise coming from equipment backup horns and the crusher.

GENERAL LEAD AGENCY INFORMATION

Lead Agency

Humboldt County Community Development Services Department, Planning Division

Staff Contact

Anita Punla, Senior Planner

Phone Number

(707) 445-7541

Address

3015 H Street
Eureka, CA 95501

Surface Mining/Conditional Use Permit Number

CUP-03-93X/SMP-03-93X

Date Issued

Pending

Expiration Date

Pending

Financial Assurances

Financial Assurances 2009

ACTIVITY	COST (\$)
Direct Costs	
Primary Reclamation Activities (74%) (grading, topsoiling)	5,811.41
Revegetation (13.1%) (native grasses, mulch)	1,028.78
Monitoring Costs (2.9%) (revegetation, 3 years)	227.74
Indirect Costs	
Contingencies (10%)	785.33
Lead Agency Administration Cost	1,000.00
Total Estimated Cost	\$8,853.26

Approved June 2, 2009 (Humboldt County Board of Supervisors), updated annually

DESCRIPTION OF MINING ACTIVITIES

HCPW will mine up to 25,000 yd³ of rock, as frequently as annually, over 15 years. The total volume extracted will not exceed 40,370 yd³. Crushing and stockpiling are included in the mining activities.

Quarrying


The mining method proposed is identical in nature to operations conducted by HCPW over the past 15 years (1994 permit period). Extraction will occur by ripping and breaking up the rock with a bulldozer or excavator. The material will then be pushed into temporary surge piles for processing. In the event localized hard rock is encountered, small-scale separation with charges may be performed. The quarry face will be maintained at a minimum of 1:1 slope, with ~15 ft. wide bench located ~40 ft. above the quarry floor. The alignment of the quarry face will remain consistent.

Mining and crushing will occur during daylight hours (sunrise to sunset), primarily on weekdays. The average time period from extraction to stockpiling will be about 4-6 weeks.

Aggregate Processing

A portable crusher assembly, consisting of jaw and cone crushers, conveyors, and a generator trailer will be temporarily located on the quarry floor. Quarried rock will be transported to the crusher via front-end loader. Processed rock will be sorted and placed onsite in stockpiles and will later be utilized for road maintenance and winter storm damage repair projects. Once crushing activities are completed, the crusher assembly will be dismantled and removed from the area.

Crusher in Operation (Charles Bar 2008)

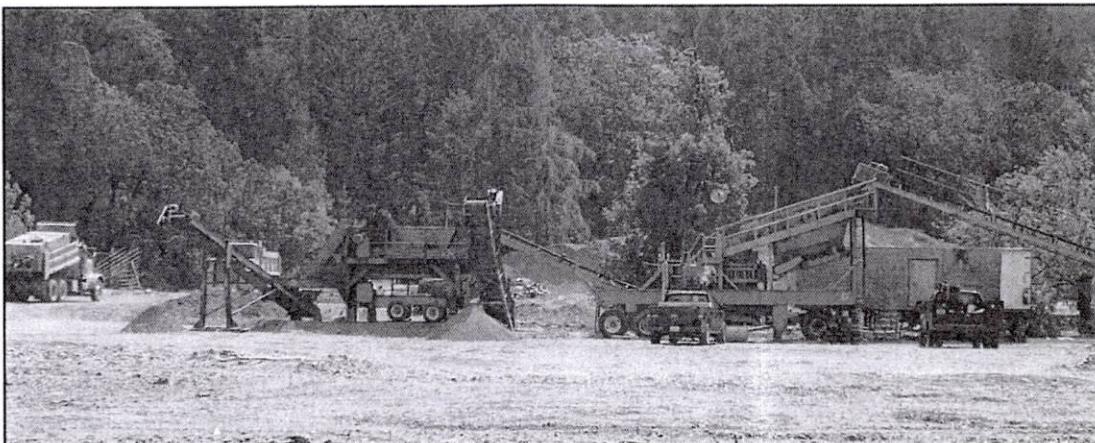

Dust Suppression

Wetting the quarry access road and quarry floor will occur during hours of operation to control fugitive dust and minimize wind erosion. Furthermore, a dust suppression system will be utilized during processing operations to further reduce fugitive dust. Offsite water is delivered to a large water storage tank via a water truck. Refilling is based on demand, typically every 2-3 days. An electric or portable gas-powered pump supplies water to strategically located misters, typically installed at the screen deck and conveyor head-pulleys. Misters may also be utilized on the cone and/or jaw, depending on the volume of dust generated by the material being processed.

Traffic Control

Traffic control will consist of placing warning signs along Kneeland Road in both directions from the quarry access road. It will not be necessary to detour or otherwise restrict traffic. Minor traffic delays may occur as vehicles slow down when they encounter trucks entering or exiting Kneeland Road from the quarry. Delays will be temporary, ending when extraction and processing activities are completed and trucks/equipment are removed from the area.

Fueling and Maintenance

All fueling, lubing, and equipment maintenance will be performed in a responsible manner. The designated staging/storage area for equipment, fuels, lubricants, and solvents related to quarrying activities will be restricted to a single location within the quarry site. Equipment will be inspected for leaks prior to starting each shift, following lunch breaks, and at end of shift each workday. Maintenance involving the removal/repair of hydraulic cylinders/hoses or of reservoirs containing hazardous products will be performed over impervious fabric resistant to Total Petroleum Hydrocarbons (TPH). A minimum of two sealed 5-gallon spill kits will be kept onsite

at all times during extraction/processing operations. One sealed 5-gallon spill kit will be kept onsite during off-haul activities from the stockpile area. All activities related to fueling, lubing, and maintenance will be performed in the designated staging area unless equipment has been immobilized due to a mechanical failure. In these instances, every effort will be made to guard against and control spills. The functional condition of fuel transfer pumps, hose assemblies, and emergency shutoff switches will be evaluated prior to usage. Personnel tasked with fueling will remain near the emergency shutoff switch during fueling operations. Topping off of fuel tanks will not occur. Fuels and lubricants will not be stored onsite after-hours or on weekends.

Either an electric or gasoline powered water pump may be used to supply water to the crushing equipment, dust suppression system. When a gasoline powered water pump is utilized, it will be situated over a drip pan or impervious fabric resistant to TPH and will be securely stored or removed from the site at end of shift each workday.

Hazardous Material Management

If leaks or spills occur in the area of operation during any extraction, processing, or stockpiling operations, they will be controlled immediately. All contaminated soil will be recovered from the site and stored in DOT approved containment vessels. All stored contaminated/hazardous material will be removed in a timely manner and disposed of at an approved disposal facility.

Annual Winterization Activities

Each fall prior to the commencement of winter rains, the quarry floor will be finish graded to control stormwater and divert it towards the center of the site. A saturation trench will be constructed at the toe of the quarry face to facilitate percolation and/or evaporate of onsite stormwater. Furthermore, each end of the trench will be finish graded to a 10:1 slope to create escape routes for animals that may become trapped. If the existing stormwater containment berm around the exterior of the site has been damaged or breached during extraction or end-haul activities, it will be reconstructed as necessary to control stormwater runoff prior to the commencement of winter rains. Any rebuilt sections of the berm will be straw mulched to reduce offsite, sediment transport of fines associated with the activity. Stormwater control measures will be adequate to contain stormwater onsite during a 20-year/1 hour intensity/magnitude storm event. Stormwater discharging from the site would be to an unknown tributary leading to Grizzly Creek ~0.5 mile downstream of the site.

Interim Management Plan

An Interim Management Plan will be filed if and when the site is in idle status.

Monitoring and Reporting

Monitoring consists of regular site inspections of the quarry by HCPW personnel for slope stability, stormwater management, berm integrity, and maintenance of the access road. Humboldt County Planning Division staff also inspects the quarry annually. Reporting consists of annual reports to the local lead agency and CA Department of Conservation as required by SMARA.

INTERIM AND FINAL RECLAMATION

As of spring, 2010, no reclamation has been undertaken due to the diminutive size of the site and the frequency of excavation and end-haul events. As quarrying has advanced into the hill and the

processing/stockpiling area has subsequently been expanded, preliminary reclamation specific to the south end of the site will begin in the near future (see Attachment 4). HCPW intends to begin utilizing stored (existing) processed material previously placed within a Class III watercourse at the south end of the site. Initially, the primary focus is to remove material from both the east and west ends of the stockpile. Once those areas have been cleared, it will allow access for the removal of material within the watercourse. Removal of material from this area will occur over the course of several years as demand for material dictates. Once removed, and the area is finish graded, HCPW will construct, vegetate, and maintain an earthen berm adjacent to the watercourse to protect against offsite stormwater and sediment discharge and to protect the rehabilitated area from further encroachment and disturbance. Restoration of the disturbed area will include revegetating with conifer and/or native grasses as deemed appropriate by the landowner. Revegetation will be performed under direct supervision of a certified botanist. See Reclamation Activities, Revegetation, Pg. 15 for specifics regarding revegetation.

Further interim and final reclamation will take place as mining operations progress towards conclusion.

Post Reclamation Land Use

Parcel (#207-036-01) is zoned Agriculture Exclusive, Timber Production Zone, with a Humboldt County General Plan land use designation of Agricultural grazing. The property owner, when consulted regarding post reclamation land use, indicated that he intends to continue utilizing all or a portion of the site as a “borrow pit” for logging and ranch related activities and will continue to store aggregate and equipment at the site once HCPW operations are complete. Continued use of the site as a borrow pit is a compatible use on land zoned for timber production. Therefore, the anticipated post reclamation land use is capricious at best and may include mining, forestry/logging, and livestock grazing. The reclamation plan is written with the intention of reclaiming the site to simulate productivity to the surrounding area to the furthest extent possible.

Public safety will not be compromised by interim reclamation of this site. The site is not located on public land and public access is blocked. Measures to protect water quality and ensure slope stability are included in the reclamation activities.

Reclamation Activities

Reclamation activities will consist of the following:

1. Development of Final Engineered Site Design/Plans.
2. Finished Grading.
3. Resoiling.
4. Revegetation.
5. Monitoring and Maintenance.
6. Post-Reclamation Monitoring

1 – Final Engineered Site Design/Plan: A licensed land surveyor will perform a topographical survey of the site approximately 14-16 months prior to closure. The survey data will then be provided to the engineer to assist in developing final site design criteria and plans. HCPW will provide OMR final design plans for review and approval no less than one year prior to closure and initiation of reclamation activities. Furthermore, to assist in determining final slope design of the quarry face, a licensed geologist may be retained to perform a geologic survey of the site and provide a geotechnical report to the engineer if deemed necessary to achieve a stability factor of

safety that is suitable for the proposed end use(s). Implementation of the plan will occur only upon approval by OMR. See Attachments 5 & 6, Proposed Final Reclamation Site Plan and Cross-Section drawing.

2 – Finished Grading: The quarry face, which will be approximately 90 ft high at end-of-project, will be finish graded to a 1:1 slope or as determined appropriate by the engineer, with a 15-ft wide bench located 40 ft above the quarry floor. Due to the height of the face, an engineered plan of the final slope will be developed and submitted for review to OMR approximately one year prior to the commencement of final reclamation activities. The quarry floor will be designed to slope gently ($\pm 1\%$) toward a centralized detention area at the center of the quarry floor or near the base of the quarry face, depending on which area has the most effectual rate of percolation. Furthermore, the floor will be ripped on the contour to a depth of 0.5-1 ft to decompact the ground and facilitate percolation of surface runoff.

The existing access road (500 linear ft) will not be decommissioned or altered, as it is the intent of the landowner to utilize the site as a “borrow pit” for logging and ranch related activities. Continued use of the site as a borrow pit is a compatible use on land zoned for timber production. This road is also a portion of existing ranch road that traverses the quarry site and continues through the property in a westerly direction.

3 – Resoiling: Material suitable for resoiling and revegetation is being stored at the site for future use. The fines stockpile (2,000-2,500 yd³) is located to the north as one enters the quarry site (see Attachment 4), and includes overburden scalped from behind the face just prior to more recent quarrying operations. It is estimated that 15-25% of the material quarried from the site is inapt for road maintenance purposes and has been separated out (screened), and remains onsite for resoiling purposes. Due to the homogeneous nature of material previously quarried from the site, one can expect the percentage or volume of material found suitable for resoiling during future operations to be consistent with that of the past, therefore it is anticipated that future quarrying/processing will result in the accumulation of an additional 6,000-10,000 yd³ of material suitable for this purpose. County road crews performing ditch maintenance or slide removal projects in the area frequently offload material at the site that is suitable for reclamation as well. Excluding imported material, calculations indicate that at end-of-project, sufficient volumes of material will be stored onsite to resoil the estimated area of disturbance (4.0 acres) to a depth of 18". The native soil will be spread over the top of the face, catch bench, and quarry floor to promote revegetation. Care will be taken to minimize compaction during spreading. In the event portions of the quarry face are resoiled and seeded, it will be track walked to produce a roughened surface prior to revegetation activities. At the owner's discretion, (as mentioned above) some areas of the site may not be reclaimed and may remain available for borrow operations.

4 – Revegetation: Graded and resoiled areas will be revegetated to facilitate the proposed end use as determined by the landowner.

A certified botanist will determine specific species suitable for revegetation based on a botanical survey of the surrounding area and concurrence with the landowner. Fast growing sterile hybrids (annuals) may be used to facilitate initial vegetative cover and assist with erosion control. No noxious weed species will be included in the seed mix. All work will be performed under direct supervision of the botanist or other qualified individual(s). A typical seed mix for initial revegetation may include a number of (but is not limited to) the following species:

- California brome (*Bromus carinatus*)
- California oatgrass (*Danthonia californica*)
- Three weeks fescue (*Vulpia microstachys*)
- Tomcat clover (*Trifolium wardenovii*)
- California melicgrass (*Melica californica*)
- Barkworth purple needlegrass (*Nassella pulchra*)
- Idaho fescue (*Festuca idahoensis*)
- Blue wildrye (*Elymus glaucus*)
- Regreen wheatgrass x wheat hybrid (*Triticum X Elymus*), this is a sterile, temporary cover crop, ideal for aiding in the establishment of native plant communities.

Areas to be seeded include the top of the quarry face, catch bench, quarry floor, areas of the face capable of supporting plant growth, the perimeter containment berm, and any other areas that have been disturbed by the operation where there is sufficient topsoil to root the above-mentioned species. Seed application density will be approximately 50 pounds per acre; however, specific rates will be determined when the seed mix is finalized. Seed application will be by hydroseeding; mulch and tackifier may be included in the hydroseed mix. Specifications regarding the rate of application, type, depth of mulch, and type of tackifier used will be based on the manufacturer and applicator's recommendation.

In mid-winter, after the initial seed application has sprouted, conifers may be planted within certain areas of operation as deemed appropriate by the landowner. The location density will be determined in consultation with the property owner and botanist.

Revegetation success for grass cover will be based on aerial coverage of 80% one year after planting, and 97% two years after planting. Wherever these goals are not met, the area will be evaluated, and subsequent planting/mulching and soil amending will be performed. Revegetation success for conifer will be based on individual plant counts. See *Post-Reclamation Monitoring* on Pg. 17 for additional information regarding revegetation success.

5 – Monitoring and Maintenance:

Containment Berms: Containment berms have been constructed around the perimeter of the quarry to eliminate offsite discharge of stormwater and sediment. They are significant in size and designed to withstand a 20-year/1 hour intensity/magnitude storm event. Furthermore, best management practices (BMP) in the form of gravel sediment traps and straw wattles are maintained at the site to control the discharge of sediment during extreme storm events. End-of-project, reclamation activities will include monitoring and maintenance of all erosion and sediment control devices (ESC) by HCPW. Inspections will occur each fall prior to the commencement of winter storms and subsequent monitoring will occur throughout the remainder of each winter period for a minimum of three years or until the landowner begins borrowing operations. Any sections rebuilt or reconstructed during reclamation will be seeded with native grasses and straw mulch to reduce offsite sediment transport of fines associated with the berm itself.

Slope Stabilization and Erosion Control: The final slope will be graded at 1:1 with a bench mid-slope. This grade is anticipated to provide a stable slope for the geology of the site. Once the slope is resoiled, mulch and tackifying agents will be applied during hydroseeding. Erosion of the quarry face will be controlled by installing rice straw/coir wattles across the slope at 10 ft

intervals (slope distance) and will be staked per manufacturers recommendations. Wattles will be maintained and/or replaced as needed to ensure continued sediment control until revegetation is concluded.

6 – Post-Reclamation Monitoring: Post-reclamation monitoring will consist of two elements, revegetation success, slope stability, and erosion control.

Monitoring for revegetation success will be determined by assessing percent of aerial cover in sample plots located on the regraded quarry face and floor. A qualified botanist, who will also perform the cover assessments, will determine the number, size and location of the plots. In addition, photographs will be taken at established photo points to document revegetation status.

Monitoring for slope stability and erosion control will be accomplished by visual observation of the regraded quarry face, looking for evidence of rill wash, gullying, and soil movement down the slope.

If revegetation and slope stability objectives are not met after three years, monitoring and reactive retreatment activities will be extended until the objectives have been met for two consecutive years.

Time Schedule

Final grading and resoiling, and seedbed preparation will be done during late summer or the fall, and will take two-three weeks to complete. Seeding and mulching will be done prior to the first rainfall event of the season. The site will be revisited in two-weeks intervals during the first winter to monitor for vegetation growth and evidence of erosion.

Additional details for each of the reclamation activities outlined above are provided under the Performance Standards section of this Reclamation Plan.

RECLAMATION PERFORMANCE STANDARDS

Wildlife Habitat

Objective: Restore habitat for use by local wildlife for cover, foraging, and as a migration corridor.

Task: The site will be regraded to topography similar to the surrounding area. The site will be revegetated with native plant species known to be good forage for local wildlife.

Backfilling, Regrading, Slope Stability, Recontouring

Objective: Final slopes to have slope stability factor of safety, suitable for proposed end use, and conforming to surrounding topography.

Task: The 90 ft high quarry face will be regraded to a 1:1 (horizontal: vertical) slope, with a 15 ft wide catch bench at a height of 40 ft. The quarry floor will be graded at an approximately 1% slope toward the base of the quarry face, and scarified to a depth of 0.5-1 ft.

Revegetation

Objective: Establish a vegetative cover suitable for the proposed end use (livestock grazing), wildlife use, and of adequate cover to control erosion and sediment transport: 80% aerial coverage one year after treatment, 97% aerial coverage two years post-treatment.

Tasks: Disturbed areas will be hydroseeded with a mix of natives, fast-growing hybrids, and erosion control grasses. Seed will be applied at the recommended rate for the seed mix and conditions. Seeded areas will be hydro-mulched with wood/fiber mulch and tackifier to ensure topsoil stability and encourage rapid plant growth. Revegetated areas will be monitored for planting success. Areas where adequate cover is not obtained will be reseeded and remulched. Monitoring will continue until revegetation goals have been achieved.

Drainage

Objective: Protect the beneficial uses of local waterways.

Tasks: Final grading of the quarry face and floor will direct stormwater runoff to a saturation trench at the base of the face where runoff will collect onsite and percolate into the ground or evaporate. Design, construct, and maintain an earthen berm capable of containing stormwater in all but the largest storm events. The entire site will be revegetated, resulting in continued erosion control and containment of fine sediment.

Prime Agricultural Land

The quarry is not located on a parcel considered to be prime agricultural land.

Other Agricultural Land

Objective: Reclaim site to be capable of sustaining forestry and agricultural production similar to the surrounding area.

Task: Finished grading will result in slopes capable of holding adequate topsoil for reforestation or forage production. The soil utilized for resoil/revegetation will be mostly native with some imported from local sources, and be of the same or similar soil type as the surrounding area. A botanical survey and consultation with the property owner will determine the species of plants with which to revegetate the site, and seeding will be done at the appropriate rate to establish grazing land of similar character and quality to the pastures in the surrounding area. Regrowth will be monitored and areas with survival below 80-97% will be replanted. Monitoring and follow-up will continue for three years, or until the site has achieved the 97% survival goal.

Building, Structure, and Equipment Removal

Objective: Removal of all buildings, equipment and supplies not required for the post-reclamation end use.

Task: There are no buildings or structures on the site and no permanent structures are needed for mining operations. All equipment and materials associated with the project will be removed when final reclamation is complete.

Surface and Groundwater Protection

Objective: Protect surface and groundwater from siltation and pollutants.

Tasks: Finished grading will confine stormwater to the site by retaining the perimeter berm and sloping the quarry floor and face so that runoff accumulates and percolates or evaporates in a at the base of the face. No equipment, structures, or materials will be left on the site that would contaminant groundwater.

Topsoil Salvage

Objective: Apply topsoil in a manner that results in stable slopes and produces maximum revegetation success.

Tasks: Soil suitable for topsoiling is being stockpiled onsite for future use in final reclamation. Roadside ditch maintenance projects in the area generate several hundred cubic yards of suitable material annually, which is also stockpiled onsite for final reclamation use. The imported topsoil is of a series and type similar to that of the surrounding area, and suitable for the proposed end use. It is estimated that the accumulated resoil material at end-of-project will be sufficient in volume to exceed the minimum depths required for successful production of the plant species to be planted (~6-10 inches). Soil will be prepared for revegetation by tracking-in. The seed mix will include fast-growing grasses commonly used to stabilize soil and minimize sediment transport. Straw/coir wattles will be installed on the quarry face slope to minimize soil erosion until vegetation is established.

Tailing and Mine Waste Management

This operation will not result in the production of tailings or mine waste.

Closure of Surface Openings

This is a surface mining operation with no openings to underground workings.

SEDIMENT AND EROSION CONTROL PLAN

Erosion and Sediment Control Principles

This section provides basic information on the principles of erosion and sediment control that shall be applied to the Hansen Quarry project site. This section is further intended to highlight certain principles that are particularly critical to achieving effective control and onsite containment of stormwater and sediment.

- Design the project to fit the natural topography, soils, and drainage patterns through such practices as limiting disturbance of steeper slopes, avoiding disturbance of natural drainage ways, and using soil during resoilng activities with a high infiltration rate, whereas, the characteristics of the site can be used to minimize stormwater runoff, erosion, and sediment transport.
- Emphasize erosion control rather than sediment control. Erosion control minimizes the entrainment of sediment while sediment control removes entrained sediment from runoff. Erosion control is more efficient and cost-effective because it is nearly impossible to entirely remove sediment from runoff once it is entrained. Examples of erosion control include covering disturbed soils and controlling surface runoff using measures such as earthen berms. Another example might be to place wattles at intervals across steep slopes to impede surface flow velocity and reduces erosion. The design of the catch bench is intended to redirect surface flow, impede flow velocity, and reduce rilling. Another illustration of the relative effectiveness of erosion control is straw mulch, which can reduce sediment concentrations in runoff over 90%.

Since it is nearly impossible to entirely prevent erosion, it will also be necessary to incorporate sediment control devices such as a retention pond, percolation trench, and earthen berm around the perimeter of the site to assure stormwater is contained onsite. Sediment controls vary in their effectiveness, but typically reduce sediment concentrations 50 to 75%. However, sediment controls have little effect on the very fine sediment that causes turbidity, whereas cover measures, such as straw mulch, can be highly effective in reducing turbidity.

- Minimize the extent and duration of area exposed. Restricting disturbance to only those areas utilized for quarrying operations is probably the single most effective form of erosion control. Additionally, exposing areas only as long as necessary reduces the risk of erosion substantially. This can be accomplished by planning the project so that areas are disturbed only when activity is imminent, that disturbed areas are finish graded to contain stormwater onsite, and those areas disturbed outside the limits of containment are straw mulched and/or seed as soon as grading is completed.
- Minimize stormwater sheetflow velocity. While erosion of exposed soil begins with a single raindrop or the wind, the largest volumes of eroded materials are typically associated with concentrated runoff forming rills and gullies. One of the most effective ways to minimize erosion, therefore, is to reduce the possibility of concentrated runoff by intercepting and conveying it in a non-erosive manner to a sediment pond or trap. This includes the use of wattles and mulch, but also includes berms, benches. Seasonal ditches may be used to intercept and control the flow of stormwater as well.

- Retain sediment on site. Sediment retention is less effective than erosion control measures, such as cover, but it is nevertheless a vital part of the project because it is impossible to completely prevent erosion and the entrainment of sediment created by runoff. Sediment can be controlled by allowing stormwater to settle out in a retention basin and/or saturation trench or by filtering runoff from small areas through vegetation or by the utilizing silt fences. Note that settling and filtration typically only remove sand-sized and coarse silt particles. Fine silts and clays cannot be removed in these ways, unless the runoff is released to vegetated areas or through chemical treatment, such as alum, or chitosan introduction or electroflocculation.
- Thoroughly monitor the site and maintain all ESC measures prior to the onset of and throughout the wet season. Maintenance and vigilance are the most vital components of effective ESC management. Certain measures require regular maintenance, monitoring and inspection. The site also needs to be constantly examined to ensure that all areas are protected, that the measures are working together to provide maximum protection.
- Schedule all quarrying and processing activities during the dry season. The climate in the North Coast region is unique in that there are generally well-defined wet and dry seasons. As a result, these events occurring only during the dry season is a very effective form of erosion control. If end-hauling or other activities do occur in the wet season, the need for regular maintenance is even more imperative.

Desired Goals From Implementing Erosion & Sediment Control Measures

To control potential sources of stormwater pollution before they come in contact with any watercourse and to control material pollution and manage waste and non-stormwater existing at the site by implementing effective handling, storage, use, and disposal practices by:

- Effectively control the entry of polluted run-off into the tributary leading to Grizzly Creek during quarrying, processing, or end-haul activities.
- Effectively control stormwater onsite during a 20-year/1 hour intensity/magnitude storm event.
- Effectively control sediment discharge from the project site, which could result in increased sedimentation into the tributary leading to Grizzly Creek.

Erosion & Sediment Control Measures

1. Soil Stabilization and Erosion Control

- ✓ Contour finished slopes per engineer's design and criteria to assure a stability factor of safety and slope stability.
- ✓ Preserve existing vegetation where appropriate and where feasible.
- ✓ Control erosion at concentrated flow paths by installing rice straw/coir wattles, straw bales, straw mulch, silt fence, or by ditching. Applies to the quarry face and newly disturbed areas outside the perimeter containment berm only.
- ✓ Control erosion of newly disturbed areas with minimal slopes by straw mulching and/or seeding. This applies to areas outside the perimeter containment berm only.

2. Sediment Control

The primary form of sediment control is onsite stormwater containment.

- ✓ Maintain a downgrade perimeter berm capable of effectively controlling a 20-year/1 hour intensity/magnitude storm event.
- ✓ Maintain a ($\pm 1\%$) slope towards a detention area at the center of the quarry floor or near the base of the quarry face.
- ✓ Annually and prior to the wet season, install a saturation trench at the base of the face, whereas, stormwater will collect and percolate into the ground or evaporate.
- ✓ Maintain stormwater diversion berms at the offsite ranch road (decommissioned) to direct sheetflow back to its natural drainage course and minimize the volume of offsite stormwater entering the quarry.
- ✓ Ensure that an appropriate seed mix containing native species shall be planted on disturbed areas outside the perimeter berm. No plant species listed as problematic and/or invasive by the California Native Plant Society and the California Invasive Plant Council, or as may be identified from time to time by the State of California, shall be used for erosion control. No plant species listed as a "noxious weed" by the governments of the State of California or the United States shall be utilized within the construction site. See Pg. 16 for a list of probable species determined to be appropriate for the site.

3. Tracking Control

- ✓ Trackout is not an issue owing to the fact that both the County Road and quarry access road are surfaced with gravel. The access road leading to the quarry will be wetted during the hours of operation to enhance surface armoring and minimize the accumulation of dust. Fine particulate on road surfaced contributes to road surface erosion and offsite sediment discharge during first of the season storm events.

4. Wind Erosion Control

- ✓ Wind erosion is controlled with water. The access road, quarry face and floor will be wetted during quarrying and processing activities. The crushing equipment is fitted with dust suppression equipment to control fugitive dust as well.

5. Inspections and Maintenance

- ✓ Inspection of all ESC devices and structures will occur prior to the onset of and throughout the wet season and will occur intermittently throughout the remainder of the year. Inspections will require an evaluation of the site to ensure that all areas are protected and that all ESC elements are working together to provide maximum protection.
- ✓ Deficiencies requiring maintenance or repair will be evaluated and addressed in a timely manner. Deficiencies that may result in a discharge will be addressed immediately. Certain ESC elements or devices may need to be replaced or repositioned one or more times during the course of the winter to assure adequate protection to minimize the chance for discharge from the site.

STATEMENT OF RESPONSIBILITY


I, the undersigned, hereby agree to accept full responsibility for reclamation of all mined lands as described and submitted herein and in conformance with the applicable requirements of Article 1 and 9 (commencing with Sections 3500 *et seq.* and 3700 *et seq.*, respectively) of Chapter 8 of Division 2 of Title 14 of the California Code of Regulations, the Surface Mining and Reclamation Act of 1975, as amended (Section 2710 *et seq.* of the Public Resources Code), and with any modifications requested by the administering agency as conditions of approval.

Signed this 5 day of, April 20 10

MINE OPERATOR OR OPERATOR'S AGENT

(Printed Name) Tom Mattson

(Mailing Address) 1106 Second Street
Eureka, CA (5501)

(Signature) 


MINE NAME Hansen Quarry

CA MINE ID # 91-12-0028


The original must be given to the lead agency and one copy to be forwarded by the lead agency to:

Department of Conservation
Office of Mine Reclamation
801 K Street, MS 09-06
Sacramento CA 95814-3529


ATTACHMENT 2 – Location Map

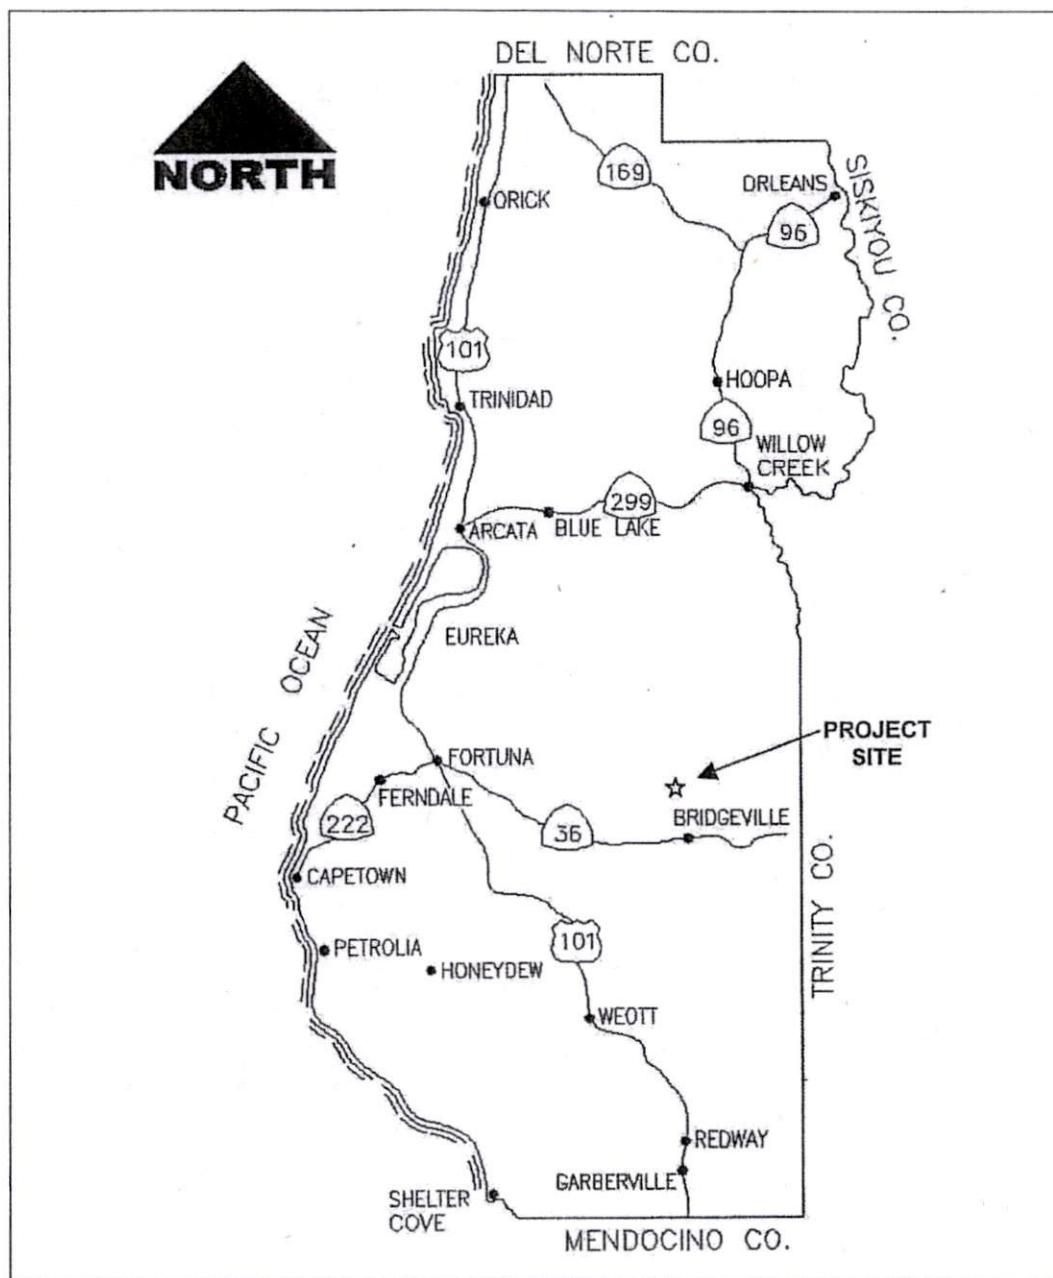


ATTACHMENT 3 A – Vicinity Map

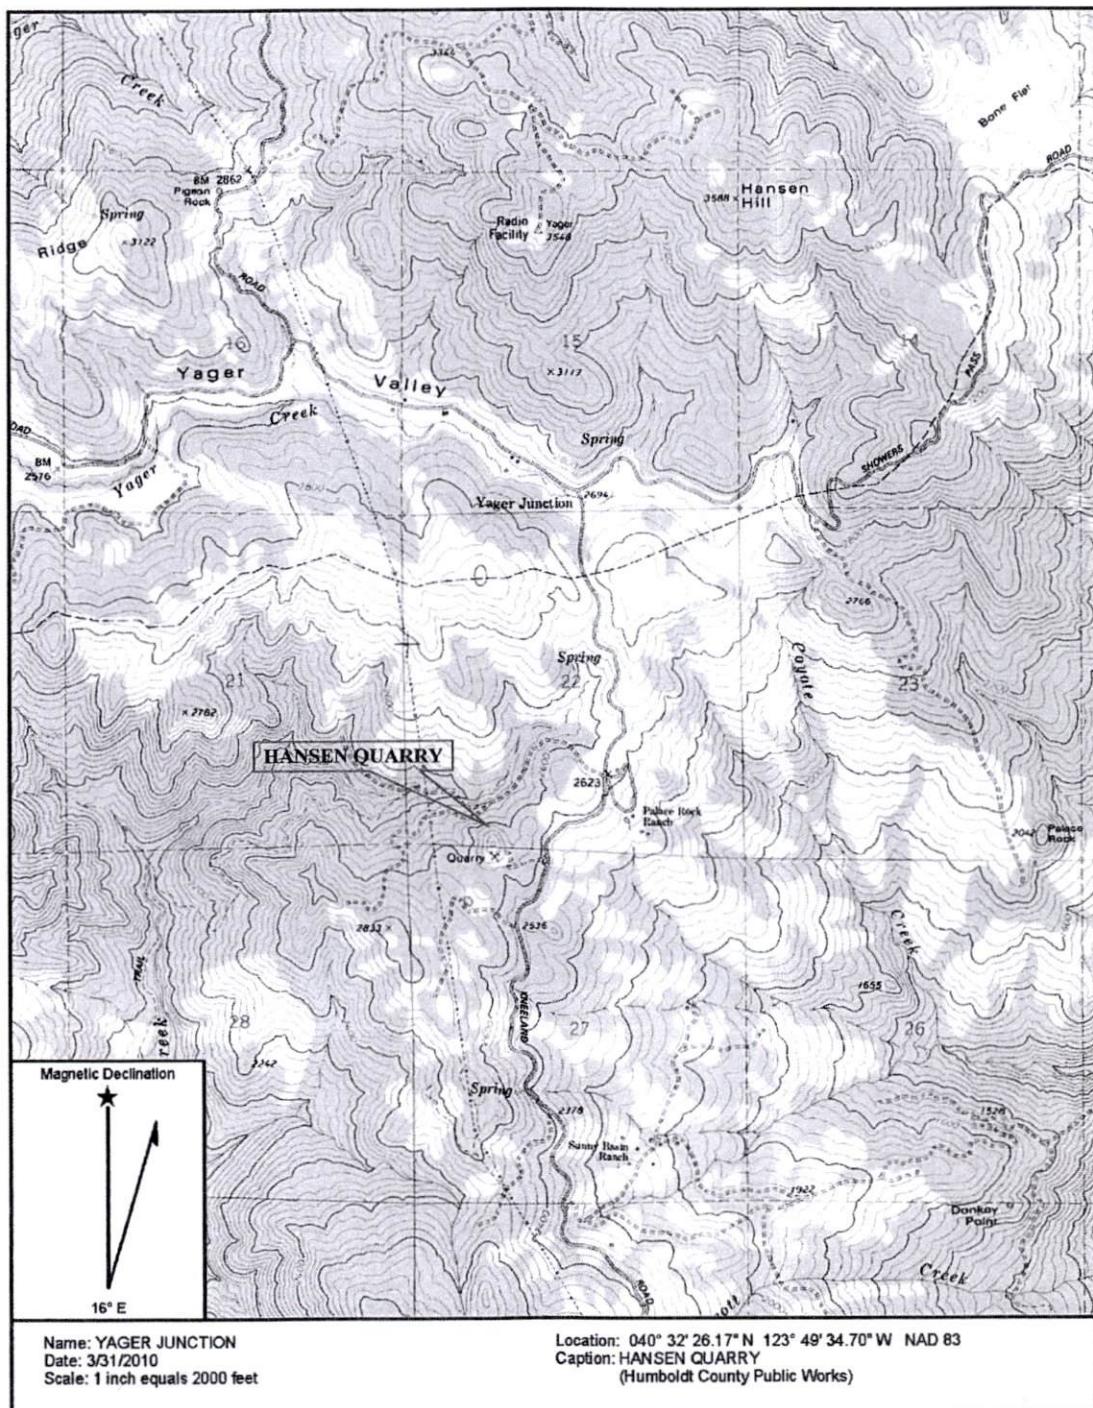


ATTACHMENT 3 B – Vicinity Map

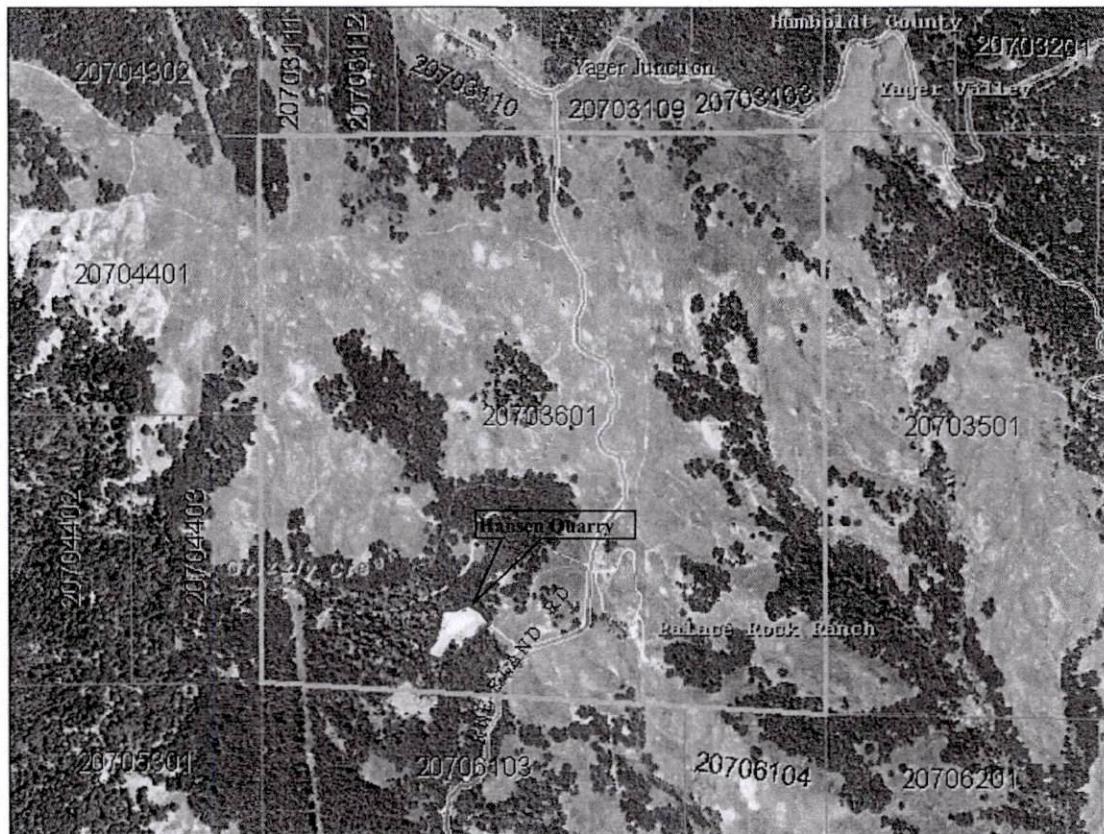


ATTACHMENT 4 – Site Map

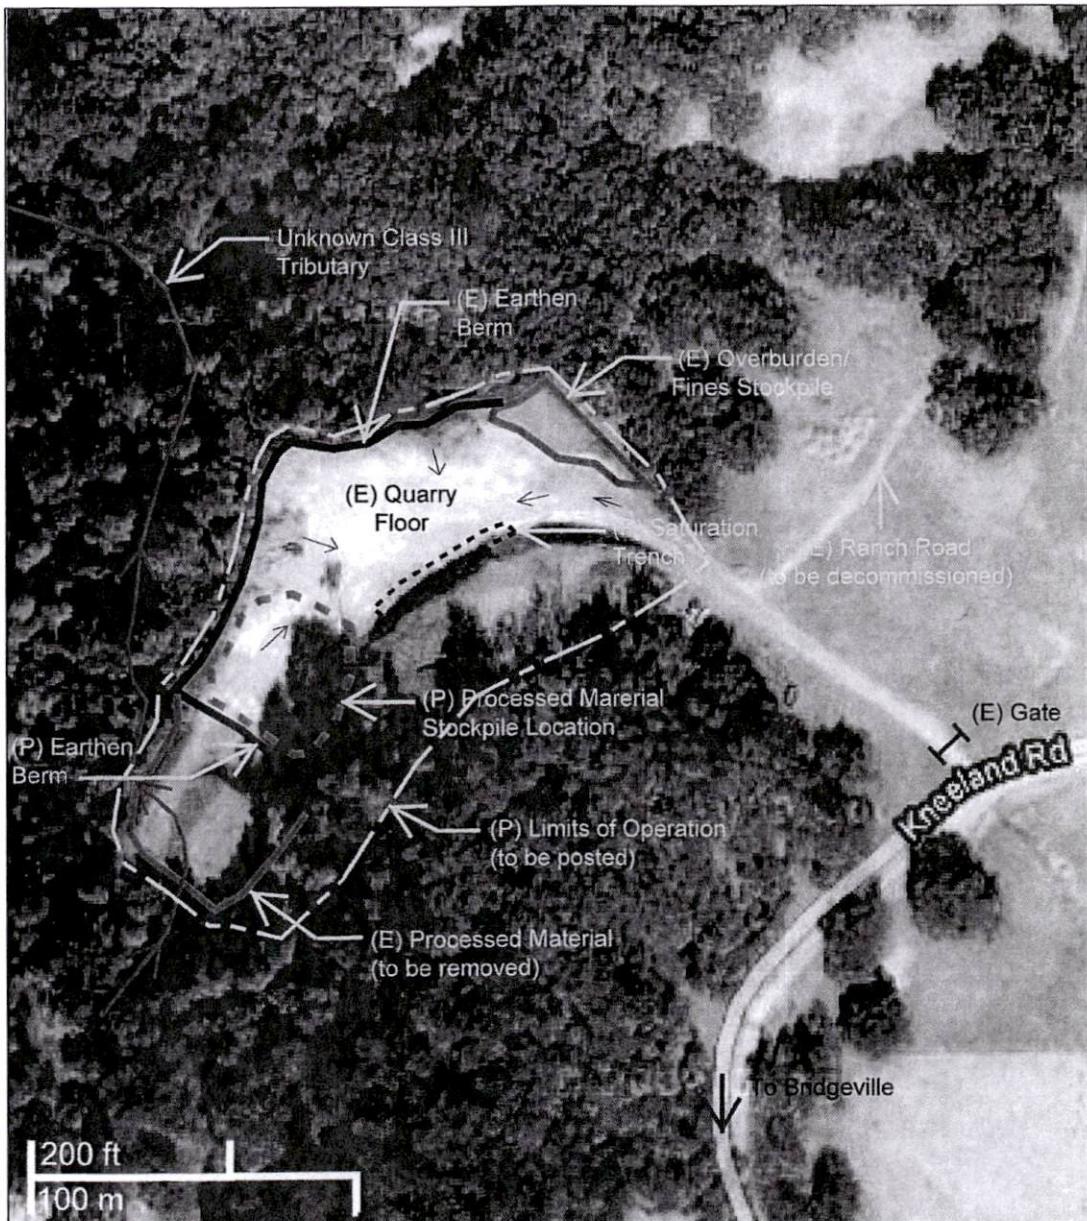

ATTACHMENT 5 – Proposed Final Reclamation Plan

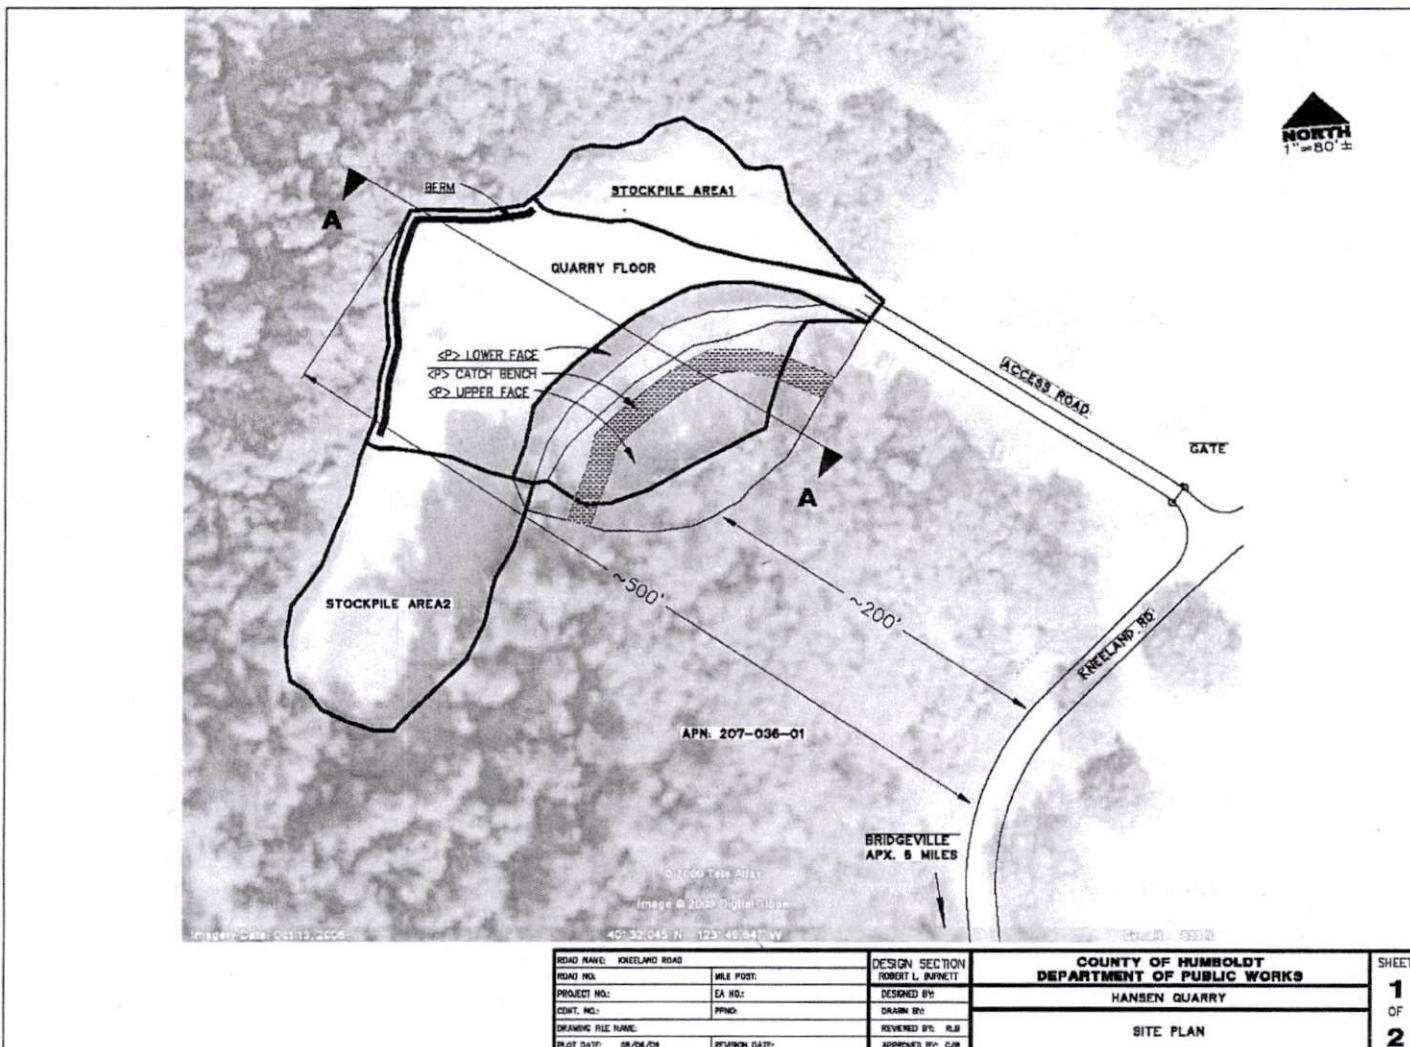

ATTACHMENT 6 – Proposed Final Reclamation Cross Section

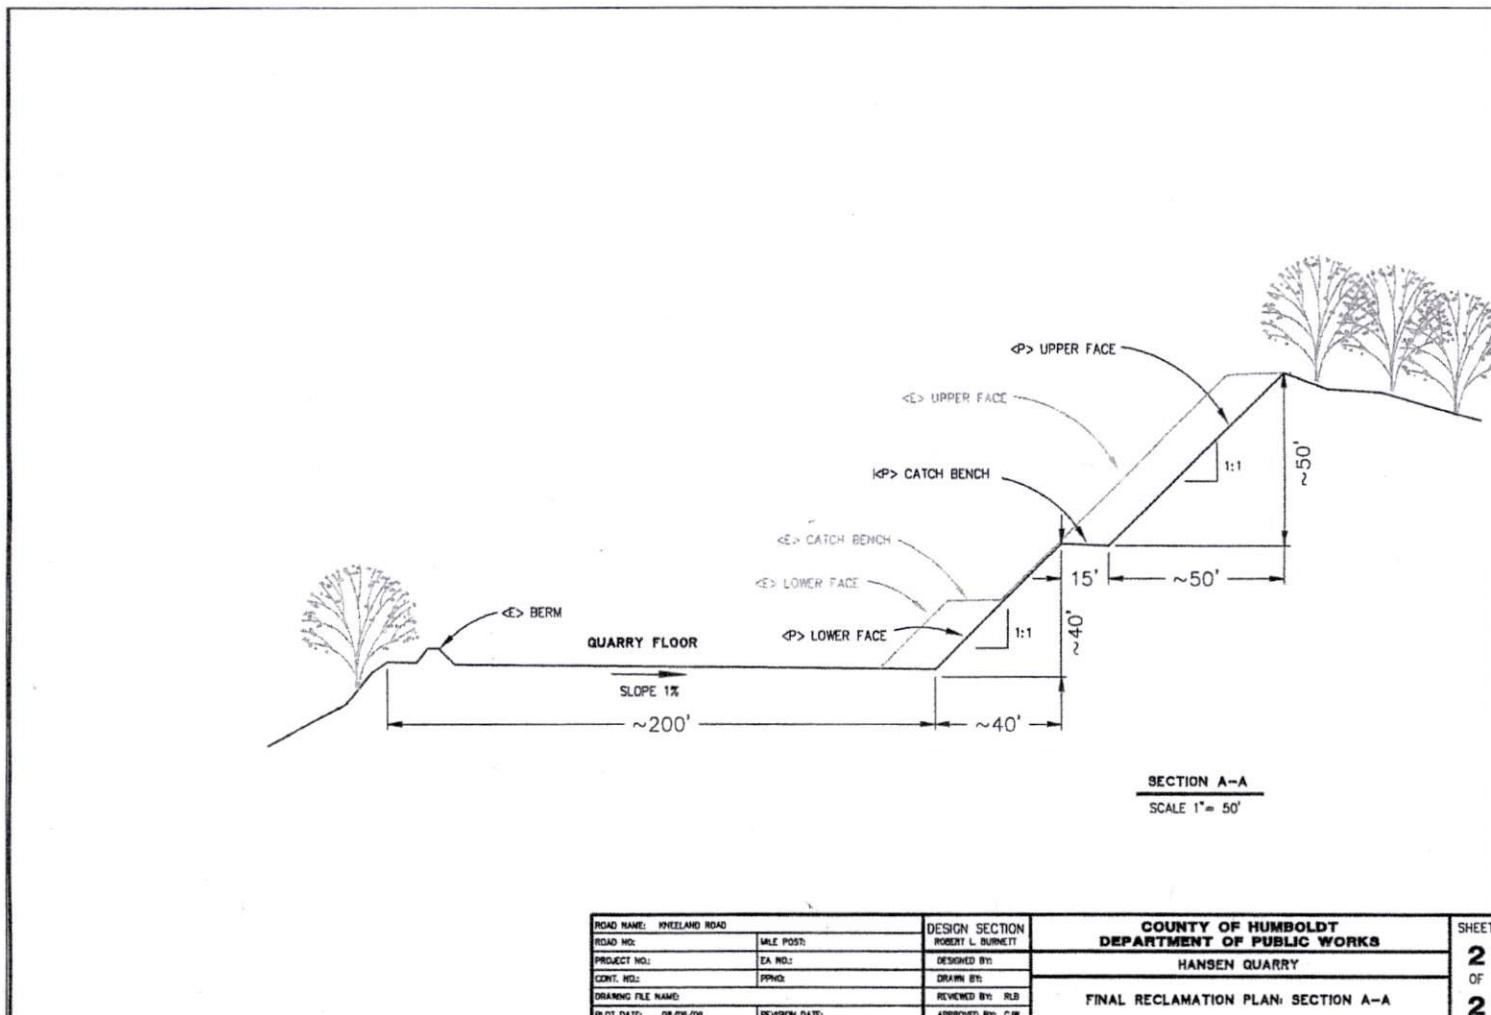

ATTACHMENT 1D - Site Plan
ATTACHMENT 4 – Site Map

